

HR921241A

Electrical Specification @25°C

RoHS Compliant (PB Free)

Isolation: 2250VDC 0.5mA 60sec (J1~8 to P1~5&Shield)

OCL: 350uH Minimum @100KHz 100mV with 20mADC

PIN1-3; PIN4-5 DCR: 1.2 Ohms Maximum

J1-2; J3-6 DCR: 1.0 Ohms Maximum

Insertion Loss: -1.0dB Maximum @300KHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 30MHz / -13dB Minimum @30MHz ~ 60MHz


-12dB Minimum @60MHz ~ 80MHz / -10dB Minimum @80MHz ~ 100MHz

Crosstalk: -30dB Minimum @1MHz ~ 100MHz

Designed To Support 57VDC, 30W When Using Any Two Channels

Designed To Support 57VDC, 60W Applications When Using All 4 Channels

Schematics

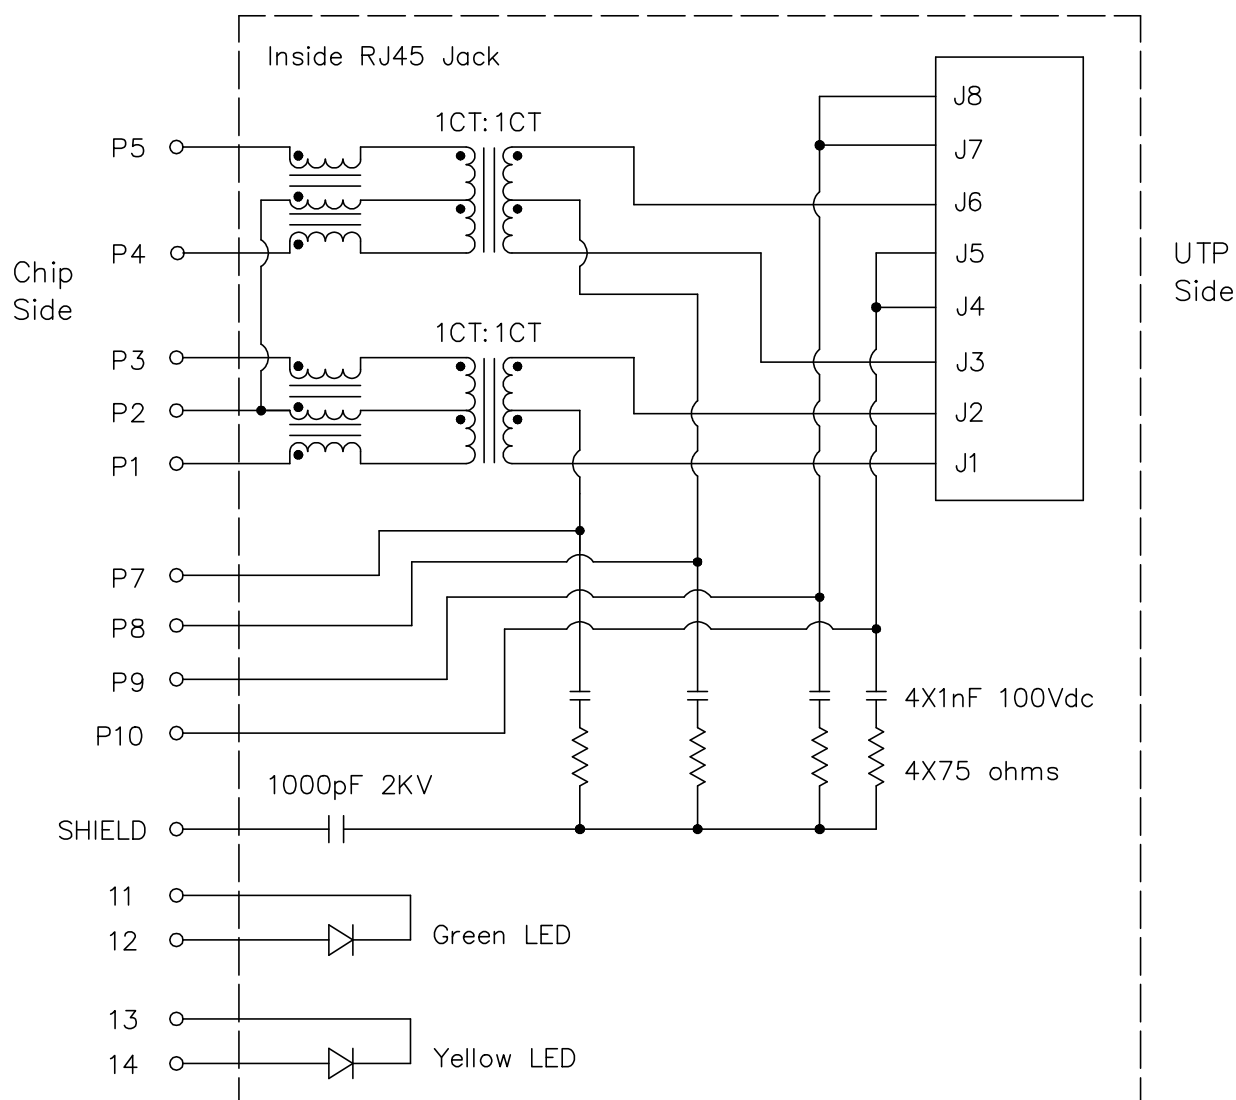


HR921241A

- RoHS Compliant (PB Free)
- Meets or Exceeds IEEE802.3at standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 2250VDC isolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to be placed on PCB, higher reliability and yields
- UL Recognized Component: File # E330599

Mechanical Dimensions:




(Top View)




(Bottom View)

Remark:

- 1.Remove Pin#6

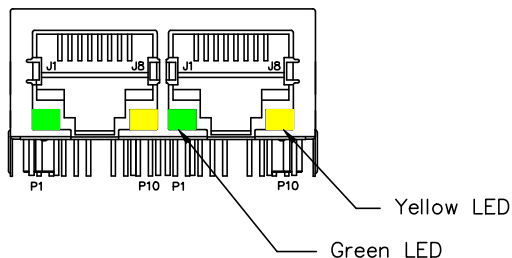

(Front View)

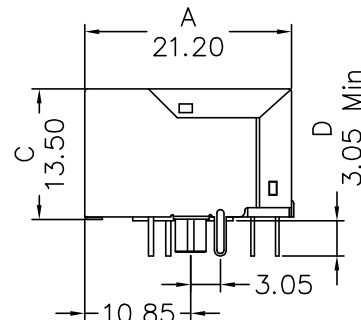

(Side View)

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness

Dimensions in mm


Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 01

2 of 4

HR921241A


PCB Layout:

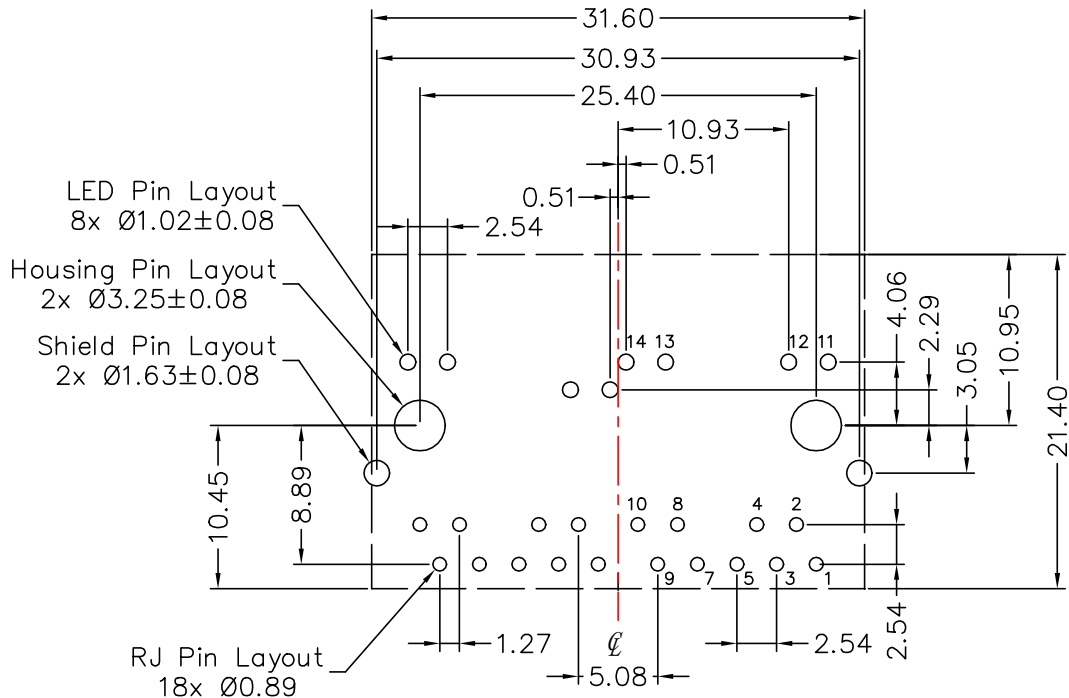

Recommended PCB layout (Component Side View)

All dimension tolerance are ± 0.08 unless otherwise specified

Suggested Panel Cutout:

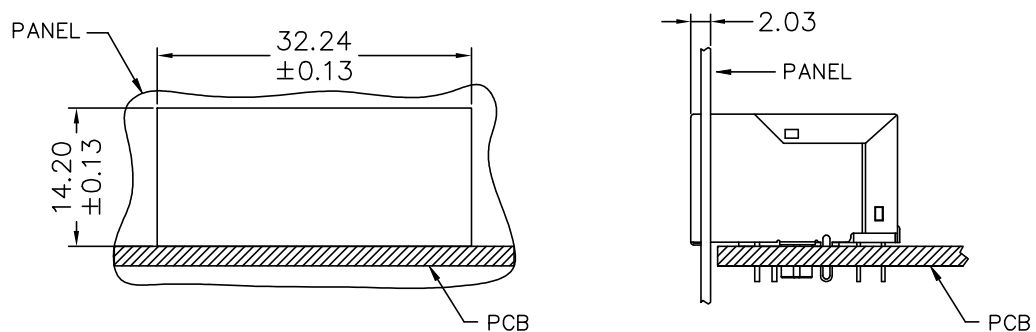

SUGGESTED PANEL OPENING

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ± 0.25

REV.: 01

3 of 4

HR921241A

Material Specification:

Housing: PA66 GF Black UL94V-0
Shield: 30u" Nickel over 0.20mm Thickness Brass
Insert: PA66 GF Black UL94V-0
Phosphor Bronze 0.35mm Thickness
Plating Area, 30u" gold over 50u" nickel
Solder Area, 100u" tin over 50u" nickel

Mechanical Performance:

Mating force: 5 lbs Maximum
Unmating force: 5 lbs Maximum
Operating life: 750 Cycles Minimum

Operating and Storage Temperature:

Operating Temperature Range: 0°C ~ +70°C
Storage Temperature Range: -40°C ~ +85°C

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 01

4 of 4