

HR602404E

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Operating Temperature Range: -40°C ~ +85°C

Isolation: 1500Vrms 0.5mA 60sec (Pri. to Sec.)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.1dB Max. @0.1MHz / -1.0dB Max. @100MHz / -2.0dB Max. @125MHz


Return Loss: -18dB Min. @30MHz / -12dB Min. @60MHz

-12dB Min. @80MHz / -10dB Min. @100MHz


Crosstalk: -43dB Min. @30MHz / -37dB Min. @60MHz / -33dB Min. @100MHz

Current Capability: 350mA Max

Schematics

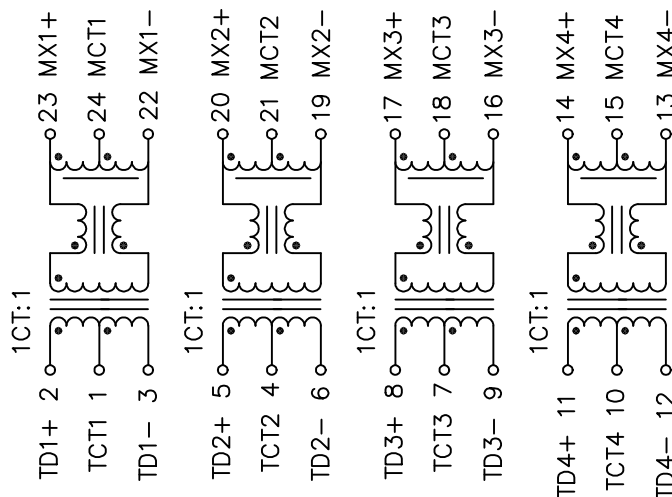

Mechanical Dimensions

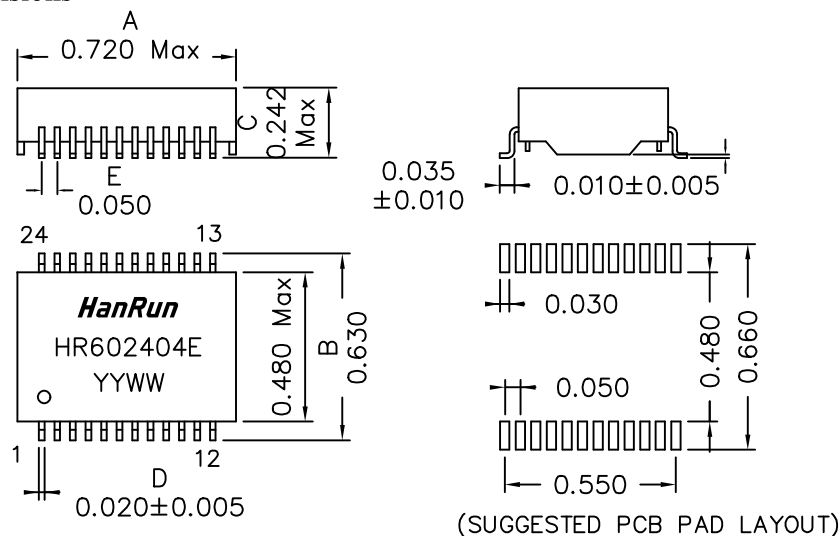

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV.: 02

1 of 1