

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com <http://www.hanrun.com>

HR911001C

Commercial standards, specifications and Summary:

RoHS Compliant (Pb Free)

Sing port Tab-UP with internal magnetics for 10/100 Base -T

Meets or Exceeds IEEE802.3ab standards including 350uH Min OCL with 8mADC

High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical

Minimum 1500Vrms isolation per IEEE802.3 requirement

UL Recognized Component: File # E330599

Material Specification:

Housing: PA46 GF Black UL94V-0

Shield: 50u" Nickel over 0.20mm Thickness Brass

Insert: PA66 GF Black UL94V-0, Phosphor Bronze 0.35mm Thickness

Plating Area, 30u" gold over 50u" nickel

Solder Area, 100u" tin over 50u" nickel

LED Conductor: PC Transparent UL94V-0

Mechanical Performance:

Mating force: 5 lbs Maximum

Unmating force: 5 lbs Maximum

Plug to Jack Retention force: 20 lbs Minimum

Operating life: 750 Cycles Minimum


Operating and Storage Temperature:

Operating Temperature Range: 0°C ~ +70°C

Storage Temperature Range: -40°C ~ +85°C

HR911001C

Mechanical Dimensions:

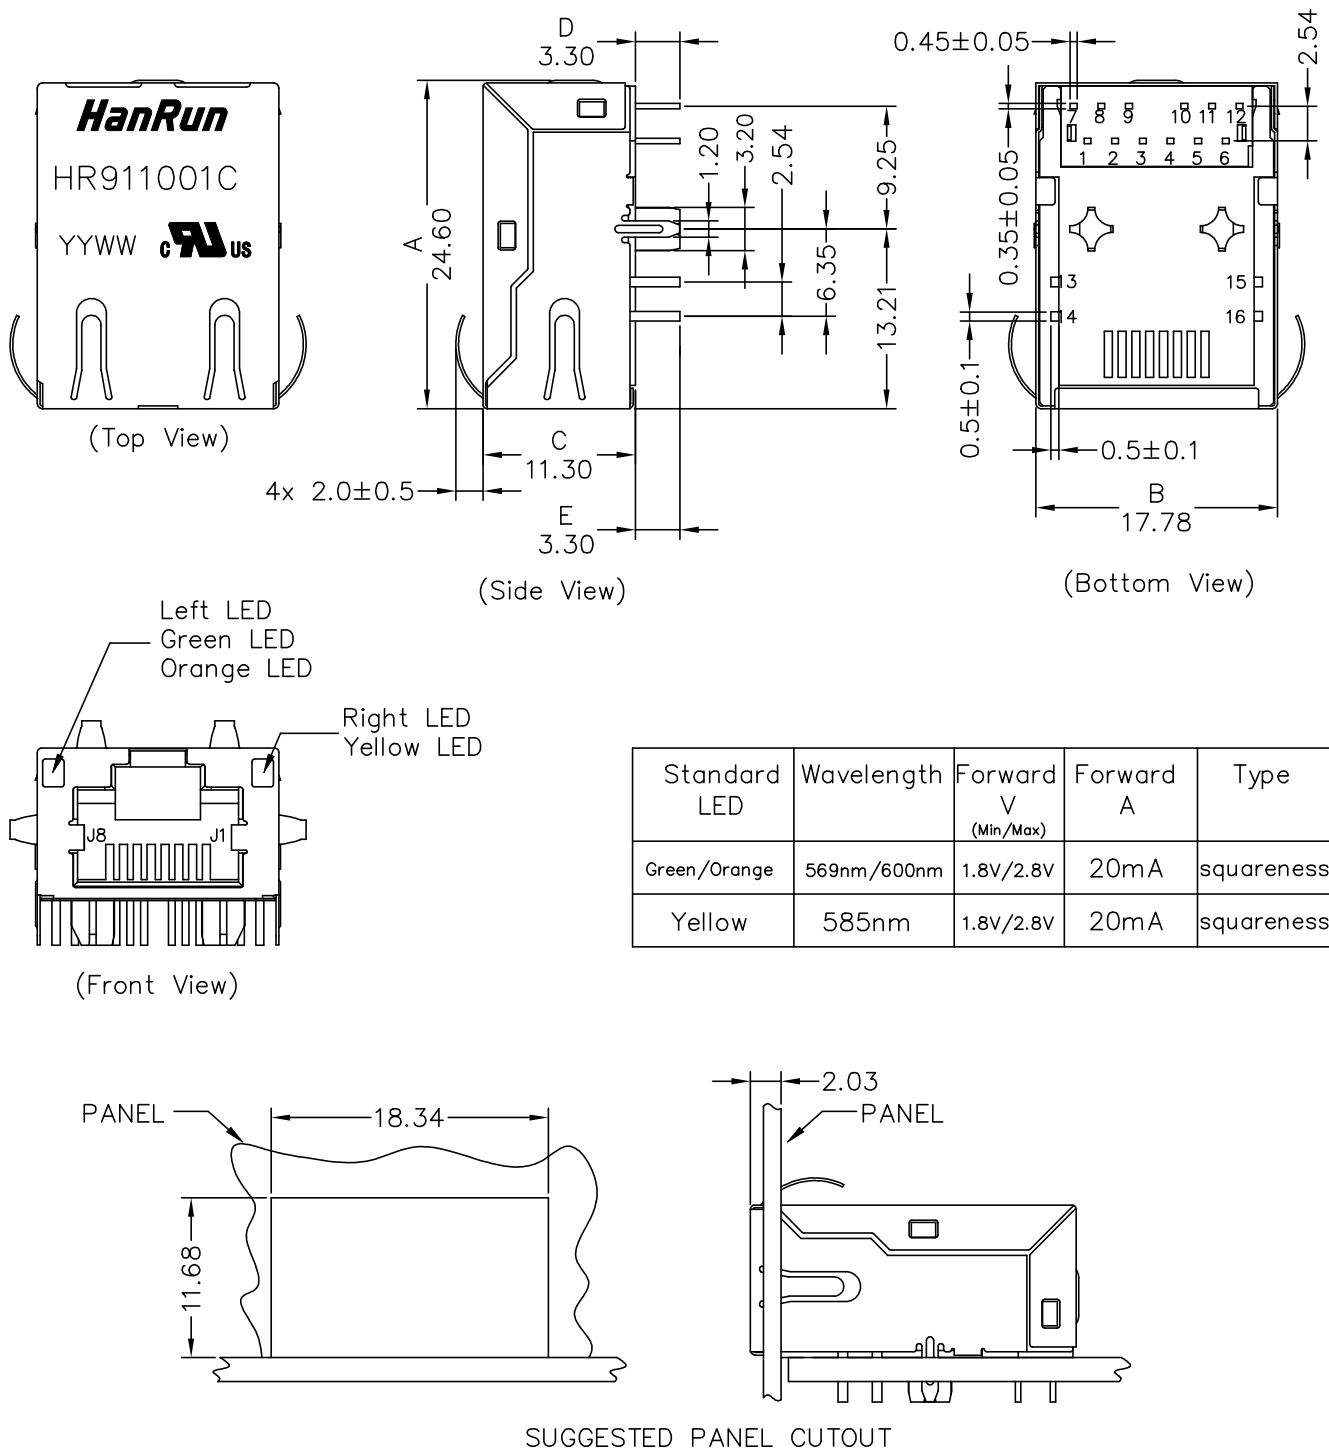

Dimensions in mm


Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 03

3 of 5

HR911001C

PCB Layout:

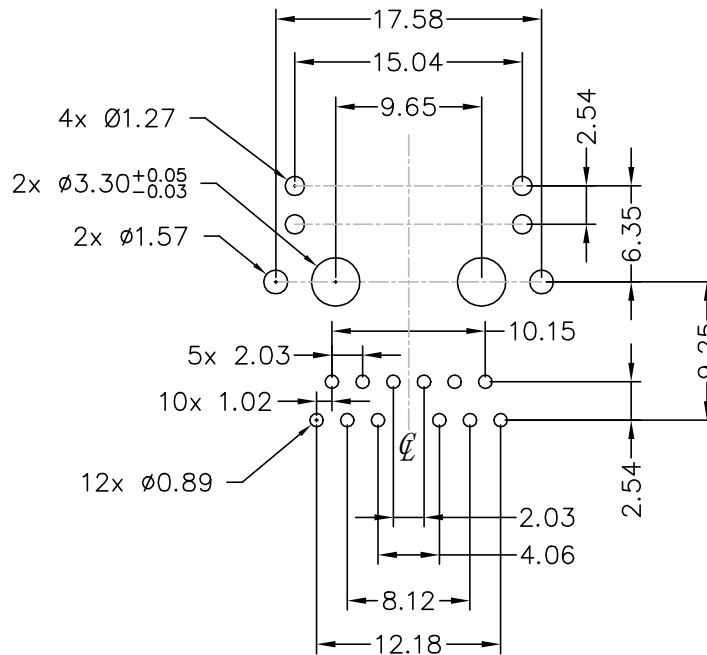


Recommended PCB layout (Component Side View)

Component side PCB thickness: 1.60mm

All dimension tolerance are ± 0.08 unless otherwise specified

HR911001C

Keep-Out Area:

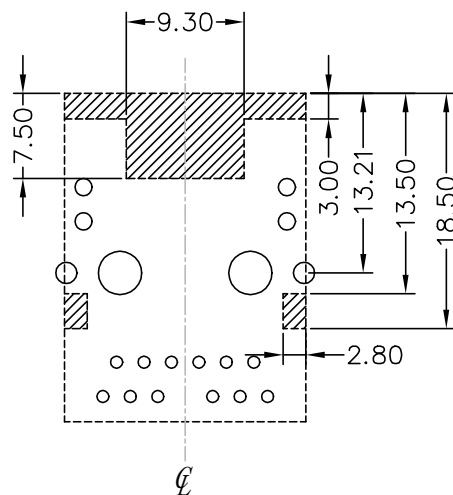


Component Side View

NOTES:

THE SHADED AREA ON THE CUSTOMER BOARD ARE
RECOMMENDED TO CLEAR OFF ANY VIA HOLE OR
COMPONENT PAD

Pin Assignments:

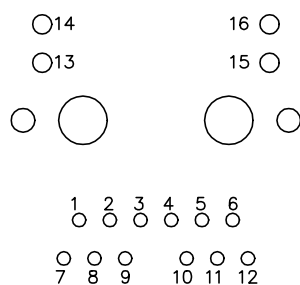

PIN ASSIGNMENTS
(COMPONENT SIDE VIEW)