

HR341310

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 1500 Vrms 1mA 3S (Windings to Windings)

Turns Ratio: Pin1-2 : Pin4-3 = 1 : 1@1KHz 0.25Vrms

Each Inductance: 7.0 mH Min @1KHz 0.25Vrms

Stray inductance: 2% Maximum @1KHz 0.25Vrms

Each DC Resistance: 350.0 mohms Maximum


Insulation Resistance: 100M ohms Min @500VDC(Windings to Windings)

Rated Current : 1.5Aac


Operating Temperature: -40°C ~ +105°C

Storage Temperature: -40°C ~ +85°C


Schematics

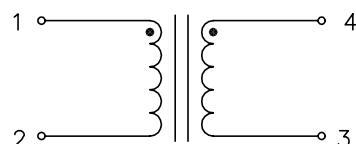


Mechanical Dimensions

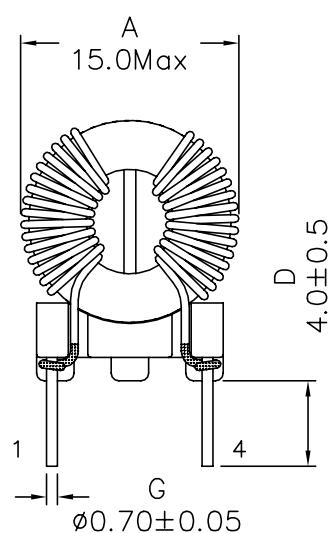

(Front View)

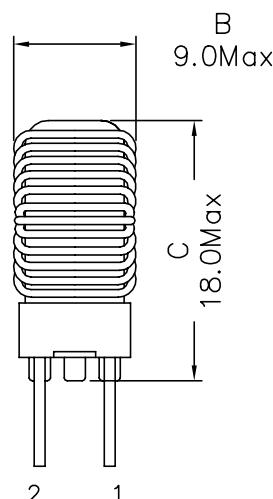

(Side View)

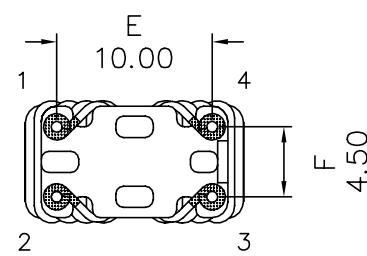

(Bottom View)