

HY604850

Electrical Specification @25°C

RoHS Compatible (Pb Free)

Meets IEEE802.3af Standards

Isolation: 1500Vrms Minimum


OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.1dB Maximum @0.1MHz / -1.0dB Maximum @100MHz
-2.0dB Maximum @125MHz


Return Loss: -18dB Minimum @30MHz / -12dB Minimum @60MHz
-12dB Minimum @80MHz
-10dB Minimum @100MHz

Crosstalk: -35dB Minimum @30MHz / -32dB Minimum @60MHz / -28dB Minimum @100MHz

Schematics

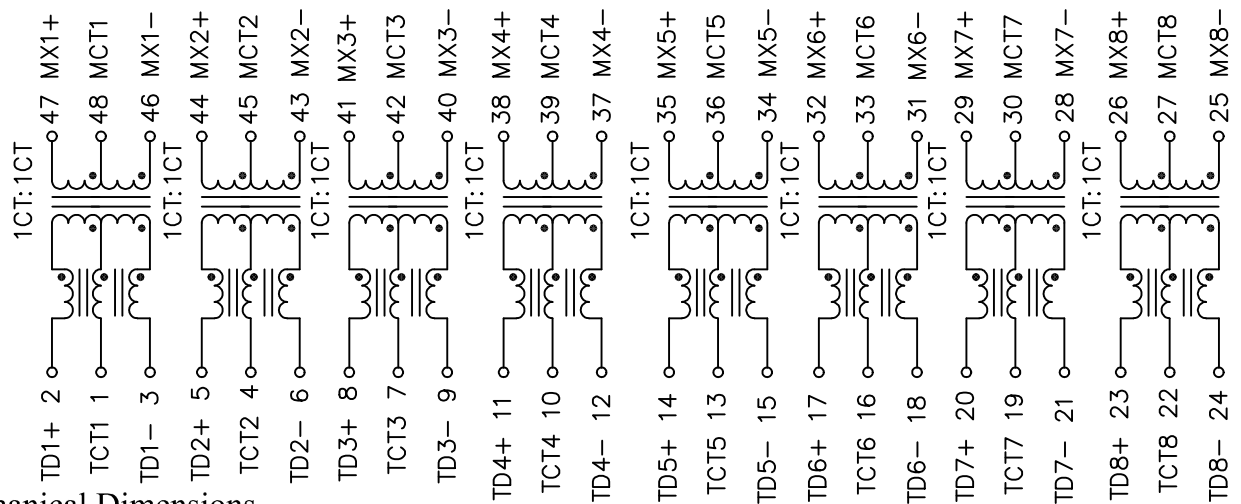

Mechanical Dimensions

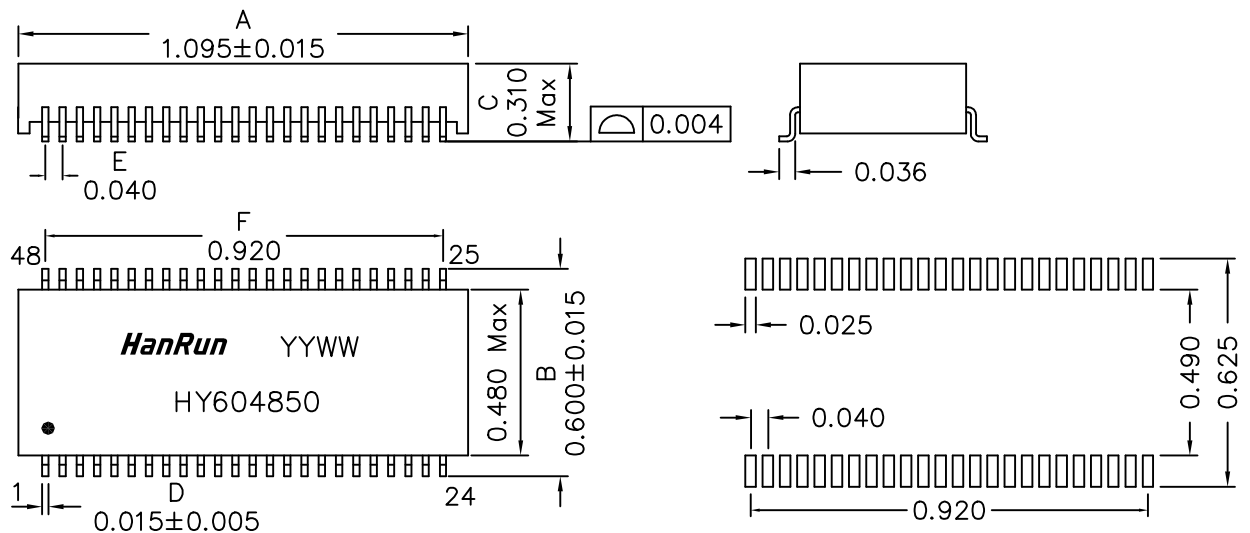

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV: A/4

(SUGGESTED PAD LAYOUT)

1 of 1