

HR605040E

Electrical Specification @25°C

RoHS Compliant (PB Free)

Operating Temperature: -40°C to +85°C

Isolation: 1500Vrms 0.5mA 60sec (P1~25 to P26~50)

OCL: 350uH Minimum @100KHz 100mV with 8mA DC Bias

Insertion Loss: -1.0dB Maximum @0.3MHz ~ 100MHz


Return Loss: -18dB Minimum @1MHz ~ 30MHz / -14.0dB Minimum @30MHz ~ 60MHz

-12dB Minimum @60MHz ~ 80MHz / -10dB Minimum @80MHz ~ 100MHz


DCMR: -40dB Minimum @30MHz / -35dB Minimum @60MHz / -30dB Minimum @100MHz

Crosstalk: -40dB Minimum @30MHz / -33dB Minimum @60MHz / -28dB Minimum @100MHz

Schematics

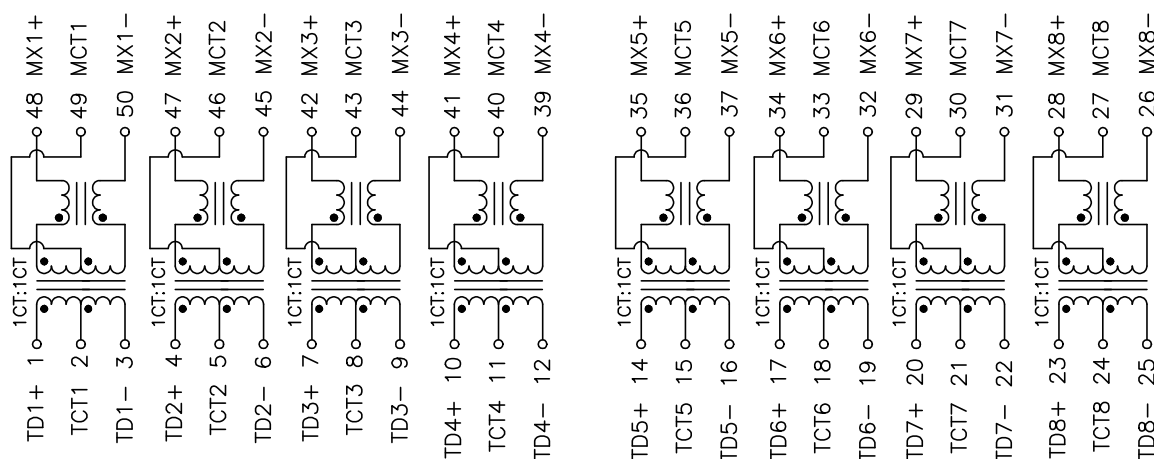

Mechanical Dimensions

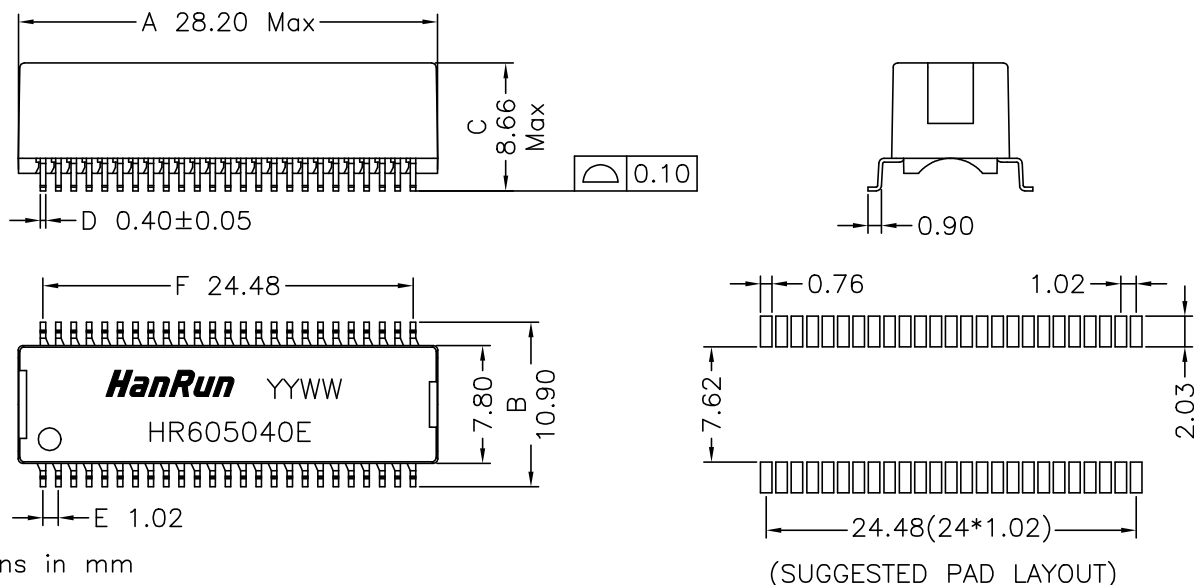

Dimensions in mm

Unless otherwise specified Tolerance: .xx ±0.25

REV.: 00

1 of 1