

HR630501-881

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 500 VAC 0.5mA 2 Sec.(P1-2 to P3-4)

Turns Ratio: P1-2 : P3-4 = 1 : 1


P1-2/P3-4 Inductance: 0.884mH $\pm 35\%$ @10KHz 1.0V

P1-2/P3-4 DC Resistance: 0.110 ohms MAX


Leakage Inductance: 5.00 uH Max

Rated Current (For 55°C Rise): 1.63 A

Schematics

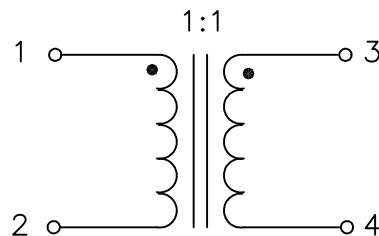

Mechanical Dimensions

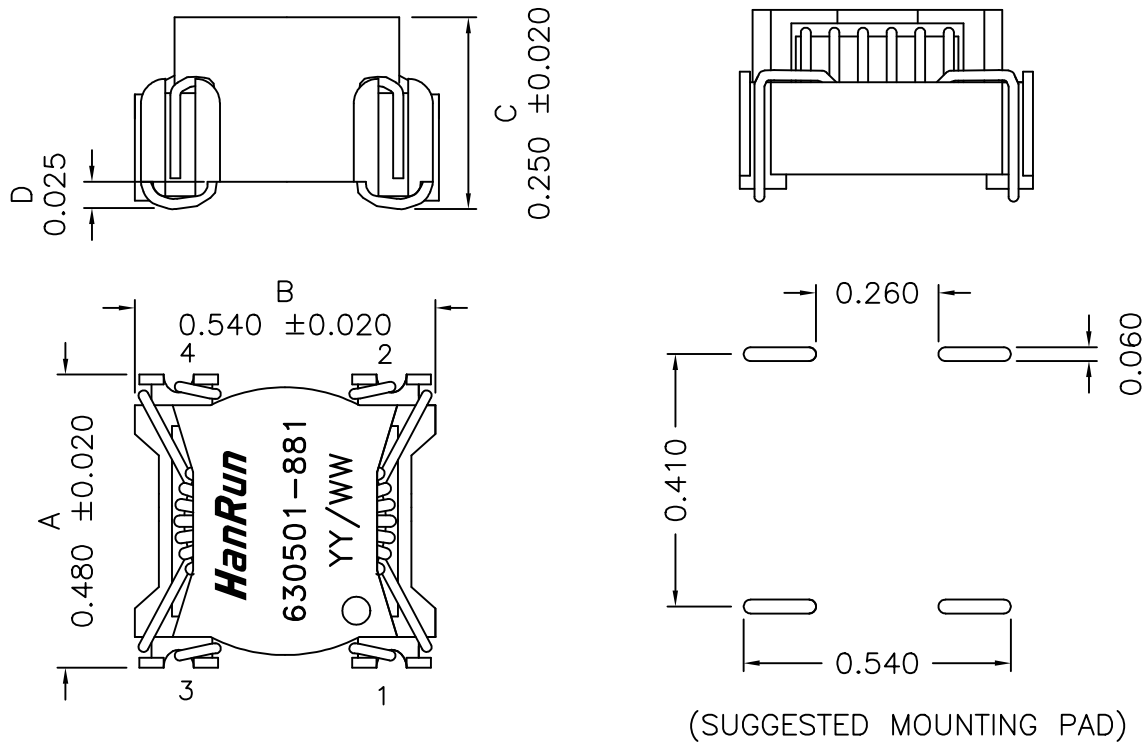

Unless otherwise specified,
Tol.: .xxx ± 0.010 (inches)