

HR011457A

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 3000Vrms 1.0mA 60S (Pri to Sec)

Isolation: 1000Vrms 1.0mA 60S (Sec1 to Sec2 ; Windings to Core)

Pin5-1 Inductance: 1.11 mH $\pm 10\%$ @10KHz 0.1Vrms

Pin5-1 Leakage Inductance: 52.0 uH Maximum. @100KHz 0.1Vrms (Shorted Other Windings)


Pin5-1 DC Resistane: 1.95 ohms Maximum

Pin7-6 DC Resistane: 23.0 mohms Maximum


Pin9-8 DC Resistane: 32.0 mohms Maximum

Turns ratio: Pin5-1 : Pin7-6 : Pin9-8 = 91 : 5 : 6 @10KHz 0.1Vrms

Schematics

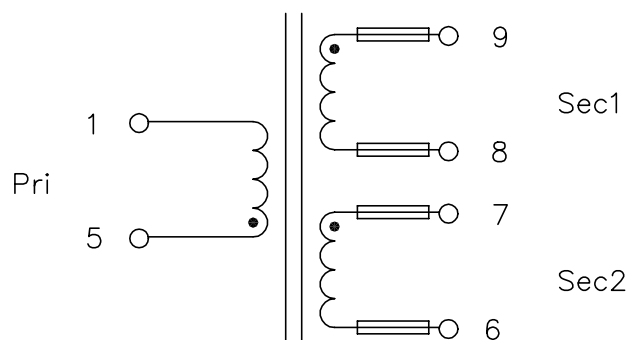

Mechanical Dimensions

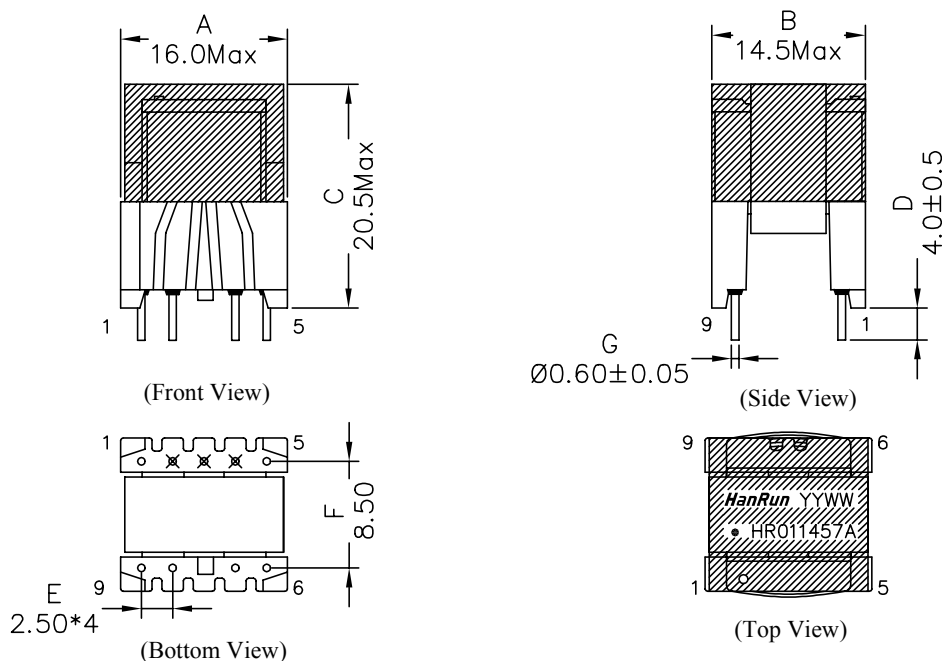

Remark: Remove Pin#2; #3; #4

Unless otherwise specified,
 Tol.: .xx $\pm$ 0.25 (mm)

REV.: A1

1 of 1