

H00817003


Electrical Specification @25°C

Properties	Test condition	Value	Unit	Tol.
Isolation	Pri. to Sec. 1mA 60sec	5000	Vrms	Min.
Isolation	Windings to Core 1mA 60sec	2500	Vrms	Min.
Inductance	P2-1 @100KHz 1Vrms	60.0	uH	±10%
Leakage Inductance	P2-1 @100KHz 1Vrms, short Sec. windings	1.3	uH	Max.
DC Resistance	P2-1	110.0	mohms	Max.
DC Resistance	P8,9-6,5	8.0	mohms	Max.
Insulation Resistance	Pri. to Sec. 2500 VDC	100.0	Mohms	Min.
Turns Ratio	P2-1:P8.9-6,5 @100KHz 1Vrms	20:4		
Application of the transformer allows for the leadwires between terminals 5&6 and 8&9 to solder bridge				


General Information

RoHS	Compliant
Operation Temperature	-40°C ~ +85°C

Schematic

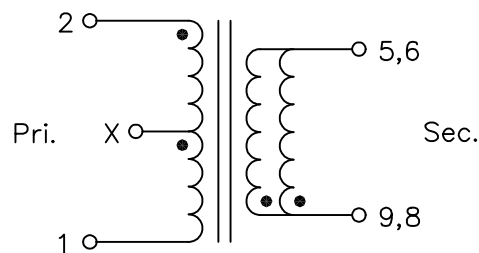

Mechanical Dimensions

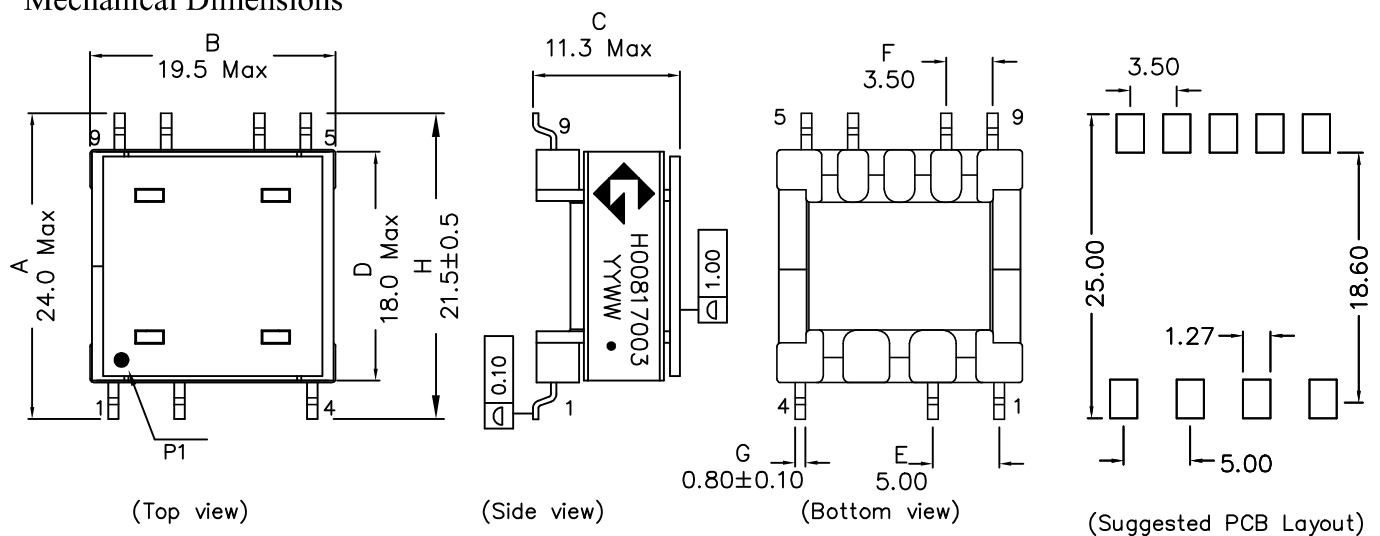

Remark: Removed P3#,7#

REV.: A0

Unless otherwise specified, Tol.: .xx ± 0.25(mm)

1 of 1

DRAWED: yuanwangsheng 2025-07-03 CHECKED:

APPROVED: David

2025-07-03

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com