

HR010890

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 1500Vac (P1-2 to P4-3)

Pin1-2 Inductance: 8.0 mH Min. @1KHz 1.0V

Pin4-3 Inductance: 8.0 mH Min. @1KHz 1.0V


Inductance Different Between P1-2 and P4-3 < 2%

Pin1-2 DC Resistance: 2.2 ohms Max.


Pin4-3 DC Resistance: 2.2 ohms Max.

Turns Ratio: P1-2 : P4-3 = 1 : 1

Schematics

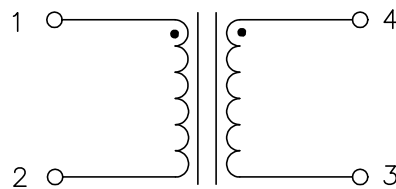

Mechanical Dimensions

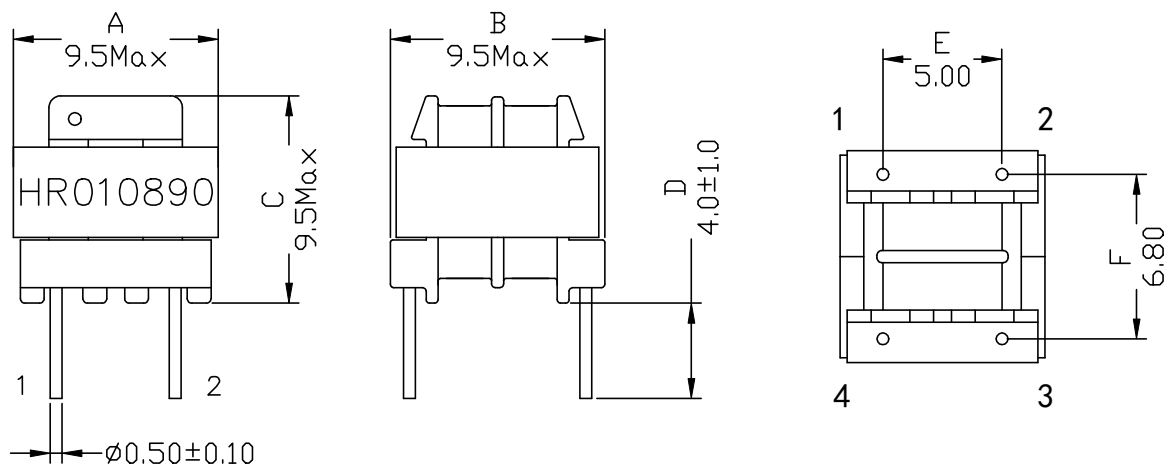

Unless otherwise specified,
Tol.: .xx ± 0.25 (mm)