

HR871198A

Electrical Specification @25°C

RoHS Compliant (PB Free)

Operating Temperature Range: 0°C ~ +70°C

Isolation: 1500Vrms 0.5mA 60sec (J1~8 to P2)

OCL: 350uH Minimum @100KHz 100mV with 8mAADC

PIN1~3; PIN4~5 DCR: 1.4 Ohms Maximum

J1~2; J3~6 DCR: 1.2 Ohms Maximum


Insertion Loss: -1.5dB Maximum @300KHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 30MHz

-10dB Minimum @60MHz ~ 80MHz

Crosstalk: -30dB Minimum @1MHz ~ 100MHz




Schematics

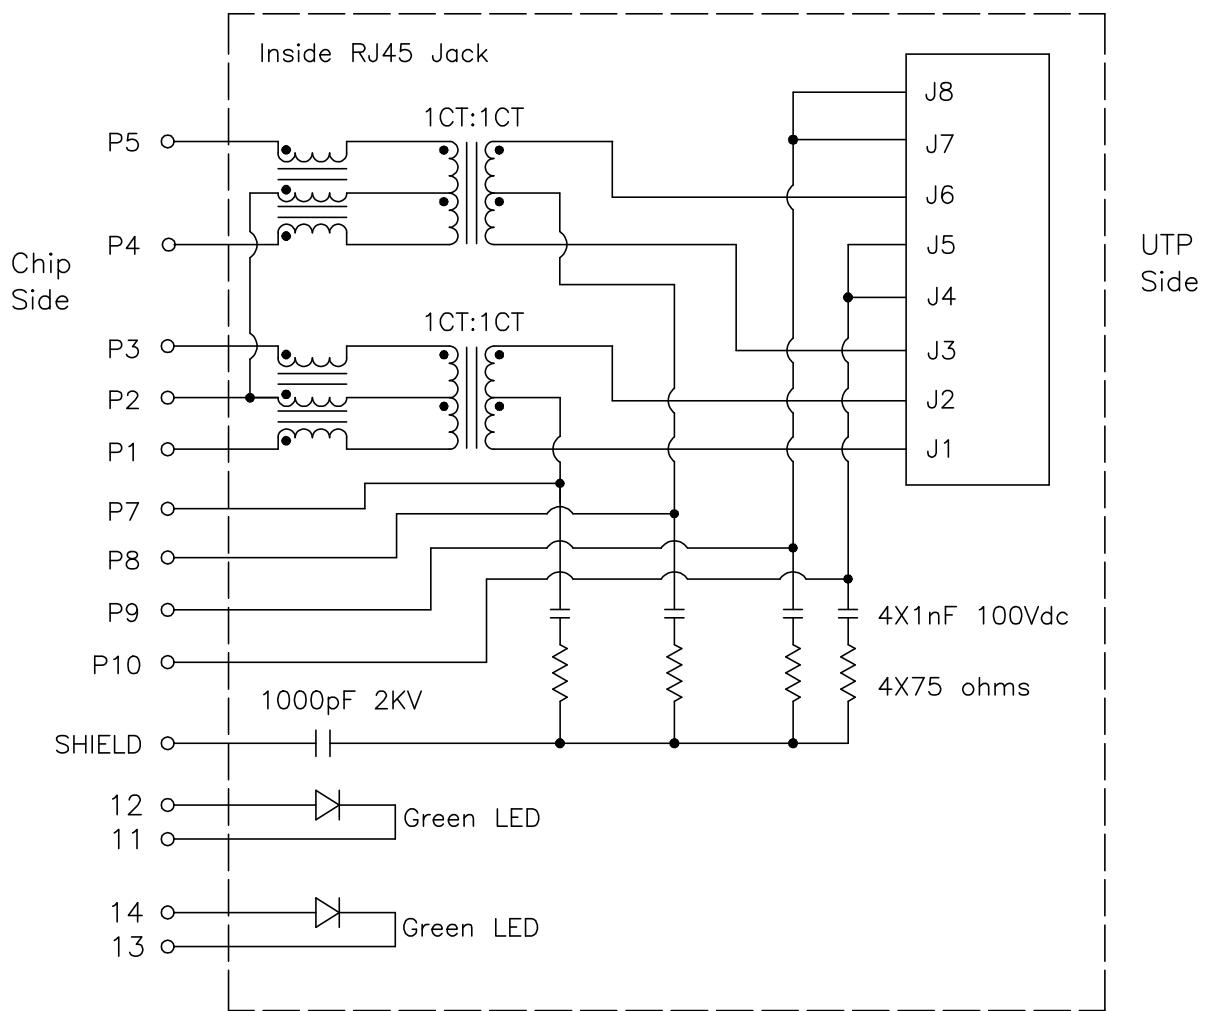


HR871198A

- RoHS Compliant (Pb Free)
- Designed for Network Interface Card Application
- Meets or Exceeds IEEE802.3af standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 1500Vrms isolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to place on PCB, Higher reliability and yields
- UL Recognized Component: File # E330599

Mechanical Dimensions:

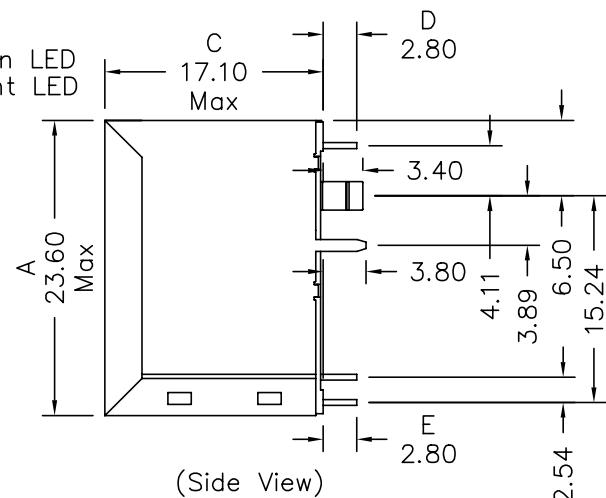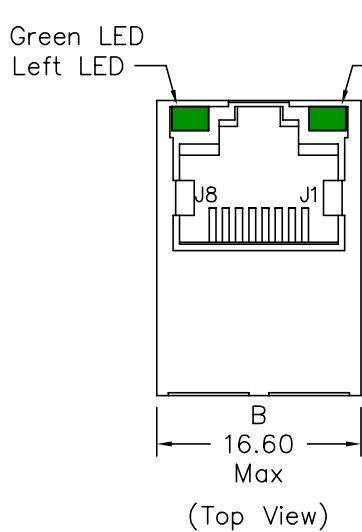

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness

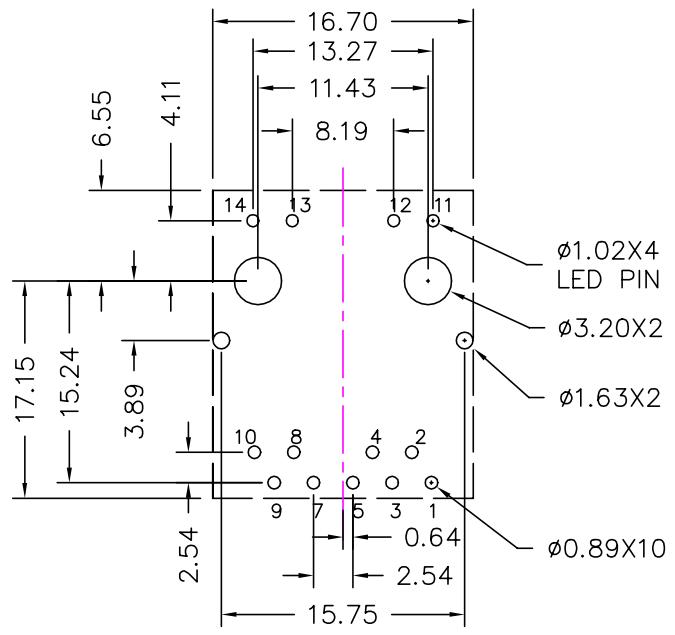

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 02

Remark:
1. Remove Pin#6

2 of 2