

HR905460AE

Electrical Specification @25°C

RoHS Compliant (PB Free)

Isolation: 2250VDC 0.5mA 60sec (UTP Side to Chip Side)

OCL: 180uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.0dB Maximum @300KHz ~ 100MHz / -1.25 Maximum @100MHz ~ 250MHz

Return Loss: -20dB Minimum @1MHz ~ 40MHz / -18dB Minimum @40MHz ~ 60MHz


-16dB Minimum @60MHz ~ 80MHz / -14dB Minimum @80MHz ~ 100MHz

-12dB Minimum @100MHz ~ 150MHz / -9dB Minimum @150MHz ~ 250MHz

Common to Differential Mode Rejection : -25dB Minimum 1MHz ~ 250MHz

Crosstalk: -28dB Minimum 1MHz ~ 125MHz / -24dB Minimum 125MHz ~ 250MHz


Schematics

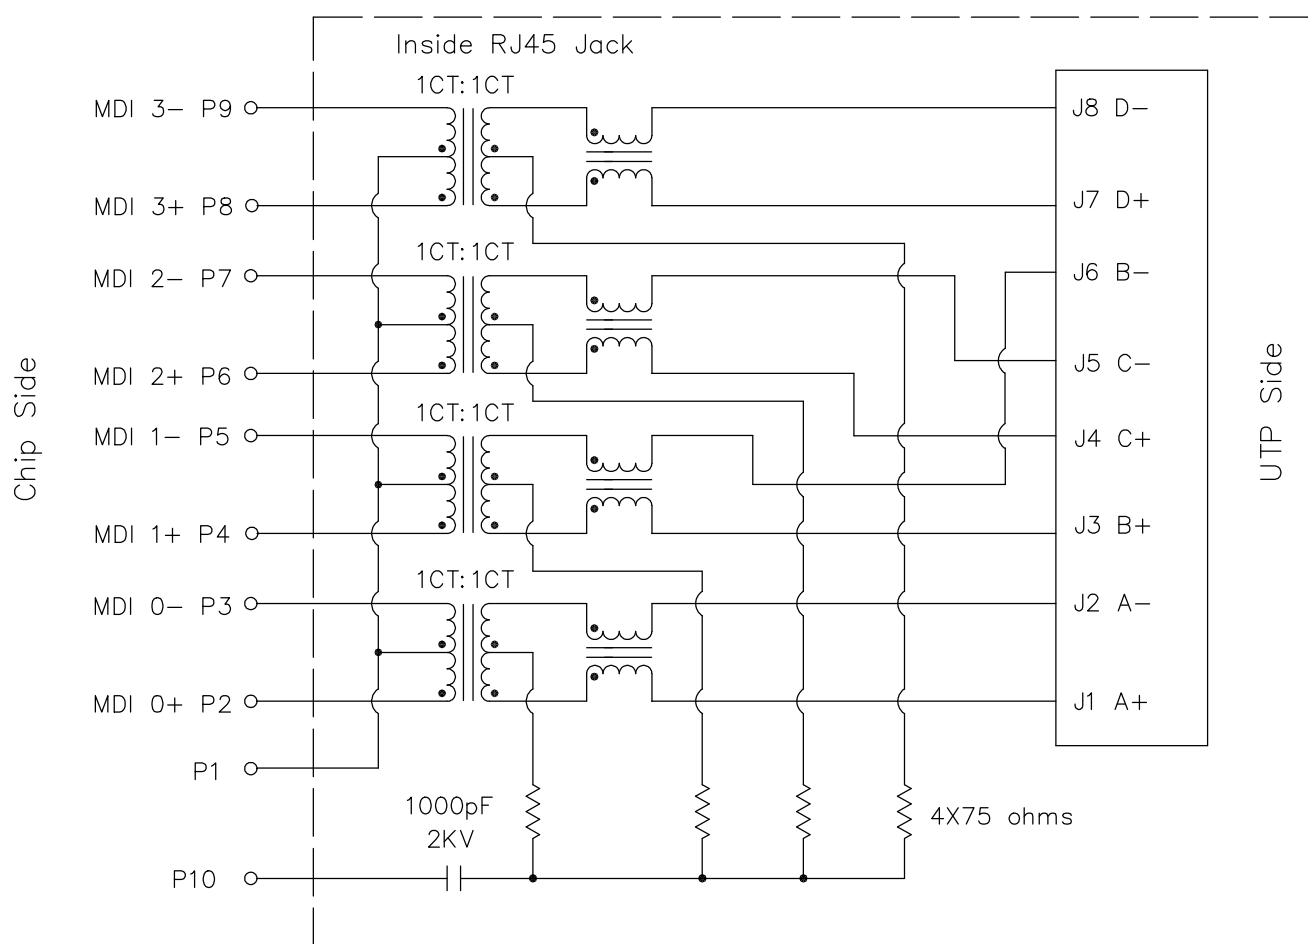

HR905460AE

- RoHS Compliant (PB Free)
- Meets or Exceeds IEEE802.3bz standards
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 2250VDC isolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to be placed on PCB, higher reliability and yields
- UL Recognized Component: File # E330599

Mechanical Dimensions

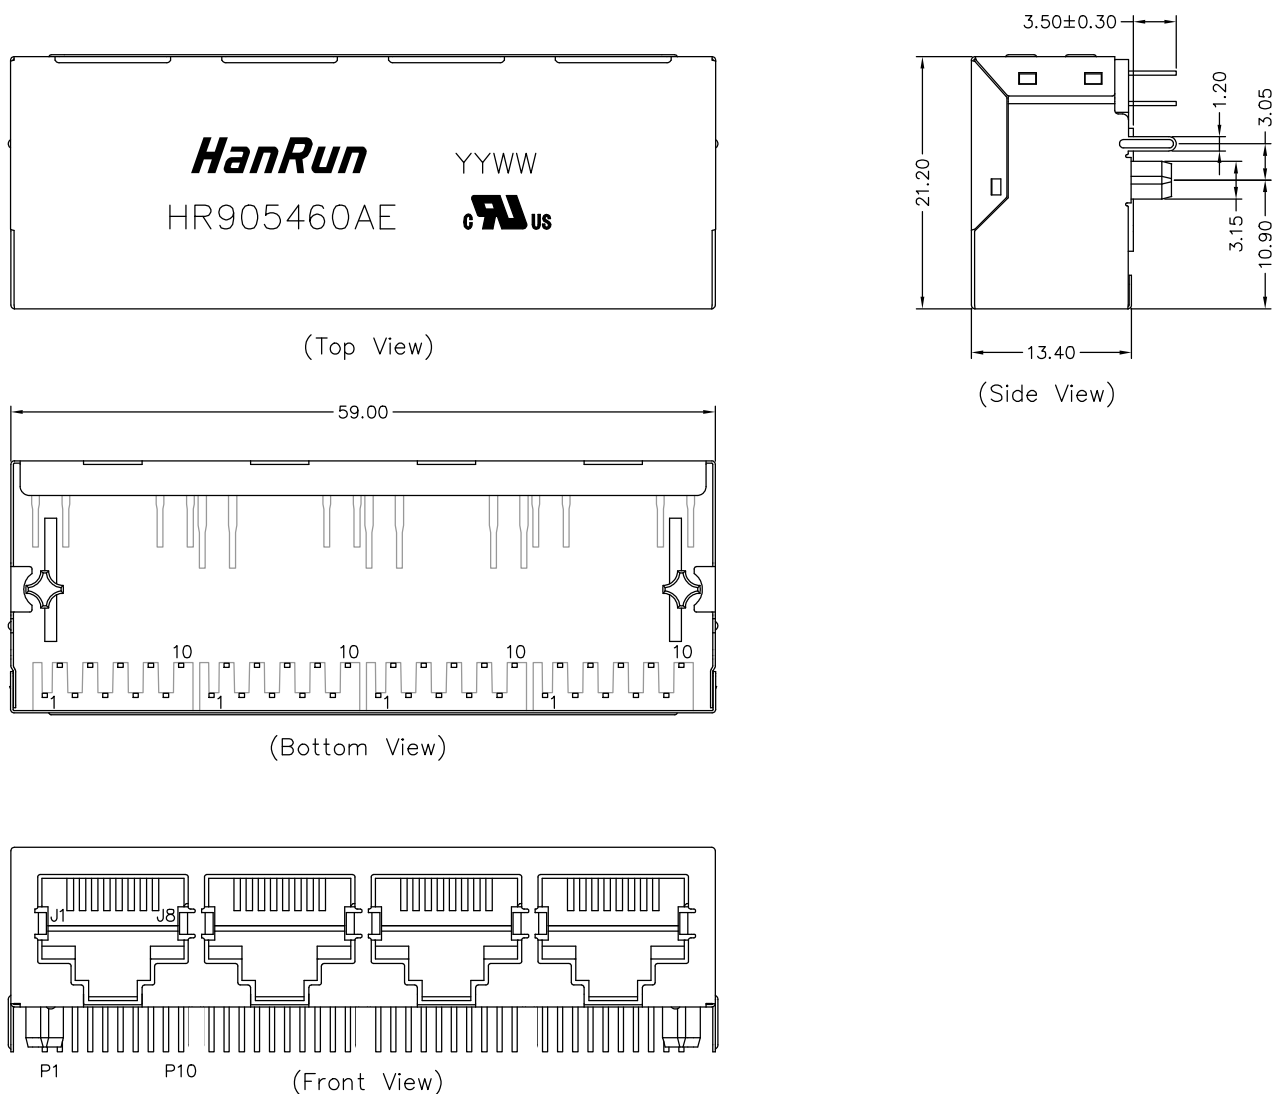

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 00


2 of 4

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com <http://www.hanrun.com>

PCB Layout



All dimension tolerance are ± 0.08 unless otherwise specified

Technical drawing of the PCB assembly showing top and side views with dimensions.

Top View Dimensions:

- Length: 59.70 ± 0.13
- Width: 14.20 ± 0.13

Side View Dimensions:

- Panel thickness: 2.03

Labels:

- PANEL
- PCB

Unless otherwise specified, Tolerance: .xx ± 0.25

3 of 4

HR905460AE

Material Specification

Housing: PA66 GF Black UL94V-0
Shield: 30u" Nickel over 0.20mm Thickness Brass
Insert: PA66 GF Black UL94V-0
Phosphor Bronze 0.35mm Thickness
Plating Area, 30u" gold over 50u" nickel
Solder Area, 100u" tin over 50u" nickel

Mechanical Performance:

Mating force: 5 lbs Maximum
Unmating force: 5 lbs Maximum
Plug to Jack Retention force: 20 lbs Minimum
Operating life: 750 Cycles Minimum

Operating and Storage Temperature:

Operating Temperature Range: -40°C ~ +85°C
Storage Temperature Range: -40°C ~ +85°C

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 00

4 of 4