

HR915300A

Electrical Specification @25°C

Isolation: 2250VDC 0.5mA 60S (UTP Side to Chip Side)

OCL: 350uH Minimum @100KHz 100mV with 8mADC


Insertion Loss: -1.0dB Maximum @100KHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 30MHz / -13.5dB Minimum @30MHz ~ 60MHz
-12dB Minimum @60MHz ~ 80MHz / -10dB Minimum @80MHz ~ 100MHz

Common Mode Rejection: -30dB Minimum @1MHz ~ 100MHz

Crosstalk: -35dB Minimum @1MHz ~ 30MHz / -30dB Minimum @30MHz ~ 100MHz

Schematics

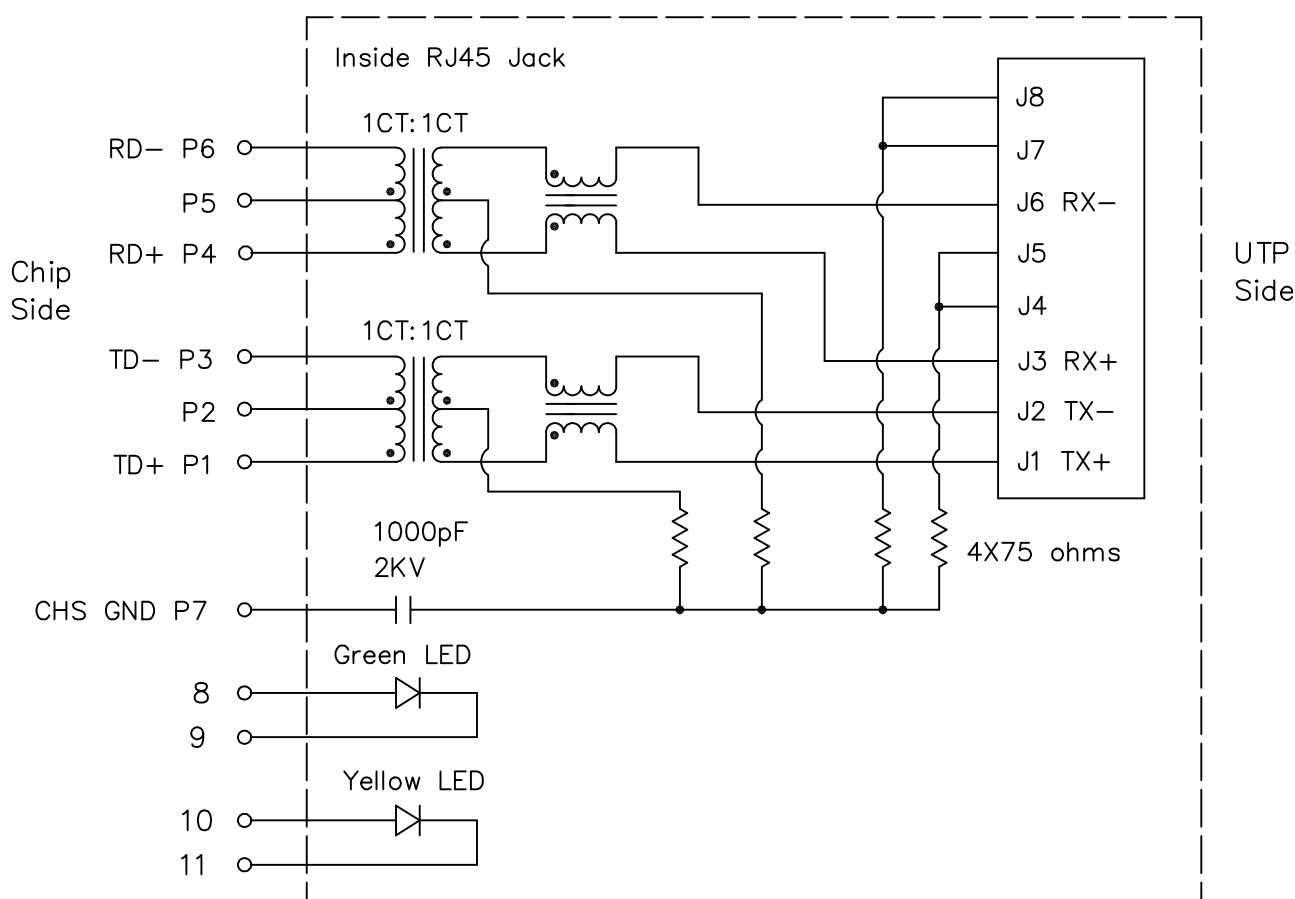


Notes: Connect CHS GND to PCB Ground

HR915300A


Commercial standards, specifications and Summary:

- RoHS Compliant
- Sing port Tab-UP with internal magnetics for 10/100Base -T
- Meets or Exceeds IEEE802.3 standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 2250VDC isolation per IEEE802.3 requirement
- UL Recognized Component: File # E330599


Mechanical Dimensions:

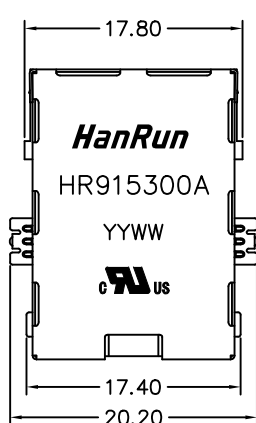


(Top View)

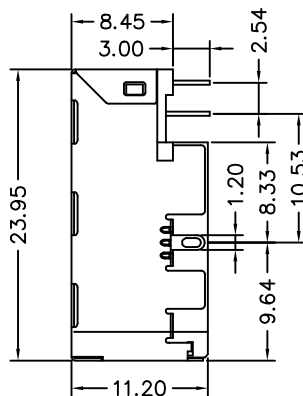

(Side View)

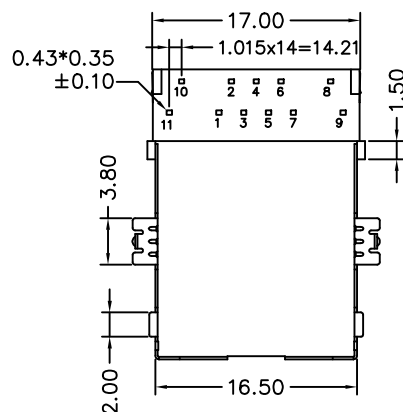

(Bottom View)



(Front View)

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	569nm	1.8v/2.8v	20mA	squareness
Yellow	585nm	1.8v/2.8v	20mA	squareness

Dimensions in mm


Unless otherwise specified, Tolerance: .xx ±0.25

REV.: 02


2 of 4

HR915300A

Suggested Panel Opening:

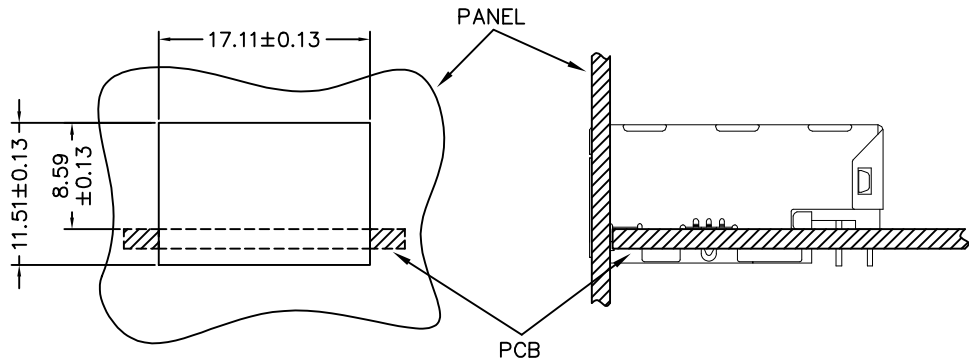

PCB Layout:

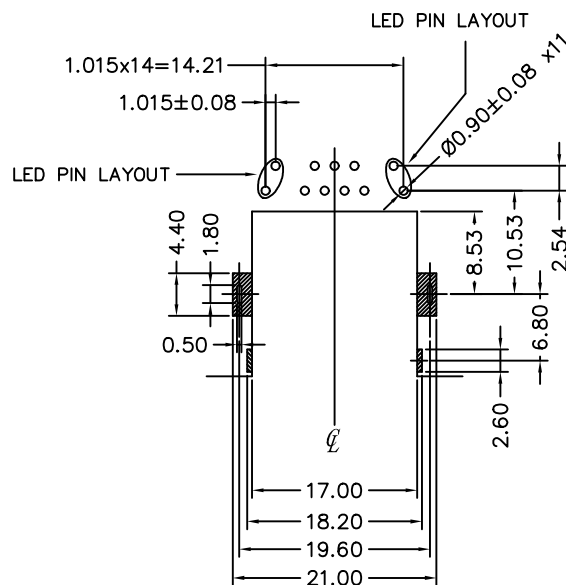

Recommended PCB layout (Component Side View)

Component side PCB thickness: 1.60mm


All dimension tolerance are ± 0.08 unless otherwise specified

NOTES ..

THE SHADED AREA ON THE CUSTOMER BOARD ARE RECOMMENDED
TO CLEAR OFF ANY VIA HOLE OR COMPONENT PAD

HR915300A

Pin Assignments:

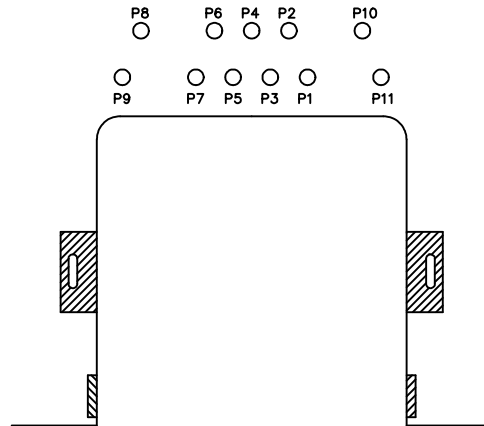

(COMPONENT SIDE VIEW)

Mechanical Performance:

Mating force: 5 lbs Maximum
Unmating force: 5 lbs Maximum
Plug to Jack Retention force: 12 lbs Minimum
Operating life: 750 Cycles Minimum

Operating and Storage Temperature:

Operating Temperature Range: 0°C ~ +70°C
Storage Temperature Range: -40°C ~ +85°C