

HR61H40L

Electrical Specification @25°C

Operating Temperature Range: 0°C ~ +70°C

Isolation: 1500Vrms 0.5mA 60Sec (Primary to Secondary)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.1dB Maximum @300KHz ~ 100MHz

Return Loss: -20dB Typical @30MHz

-14dB Typical @60MHz


-11.5dB Minimum @80MHz

Different to Common Mode Rejection: -37dB Typical @30MHz ~ 50MHz


-30dB Typical @100MHz

Crosstalk: -45dB Typical @1MHz ~ 30MHz / -35dB Typical @60MHz ~ 100MHz

Schematics

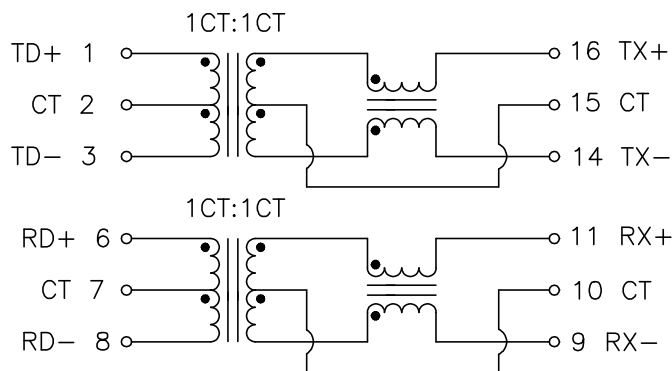

Mechanical Dimensions

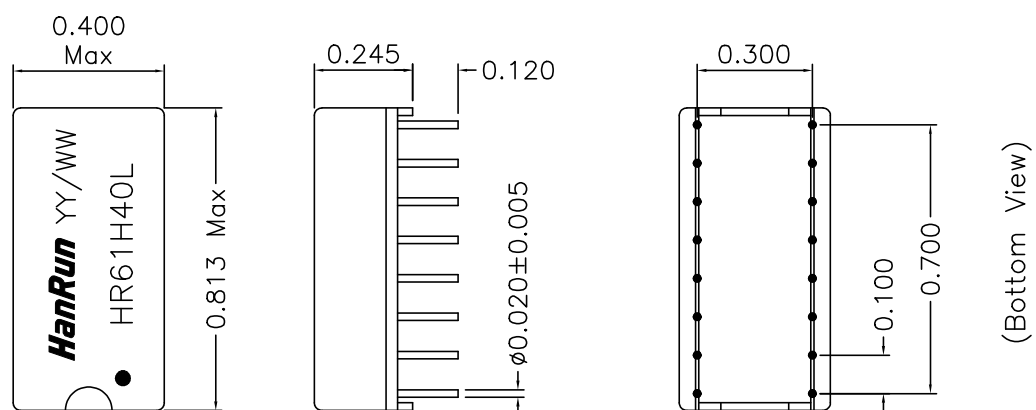

Dimensions in inches

Unless otherwise specified, Tol.: .xxx ±0.010

REV.: A2

1 of 1