


HR630201-XXX

Electrical Specification @25°C


Part Number	Inductance (uH ±35%)	Irated (Adc Max)	DCR (mOhms Max)	Leakage Inductance (uH Min)	Test Frequency	REF
HR630201-950	95	12.5	3.0	0.15	10KHz,1V	R1
HR630201-221	220	3.3	60.0		10KHz,1V	R1
HR630201-481	484	8.0	7.7	1.5	10KHz,1V	R1
HR630201-591	590	5.6	21.0		10KHz,1V	R1
HR630201-601A	600	4.5	40.0		100KHz,1V	R1
HR630201-771	770	4.7	40.0		10KHz,1V	R1
HR630201-102A	1000	2.5	40.0		10KHz,1V	R1
HR630201-102B	1000	5.0	40.0		10KHz,1V	R1
HR630201-102C	1000	3.6	50.0		10KHz,1V	R2
HR630201-132	1320	3.3	60.0		10KHz,1V	R1
HR630201-152	1470	2.8	80.0		10KHz,1V	R1
HR630201-302	3000	2.5	80.0		10KHz,1V	R2
HR630201-302B	3000	2.5	80.0		10KHz,1V	R2
HR630201-103	10150	1.4	210.0	25.0	10KHz,1V	R1

Schematics





Mechanical Dimensions



R1

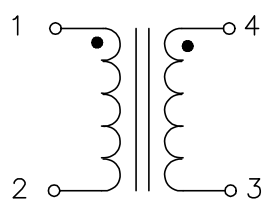

R2

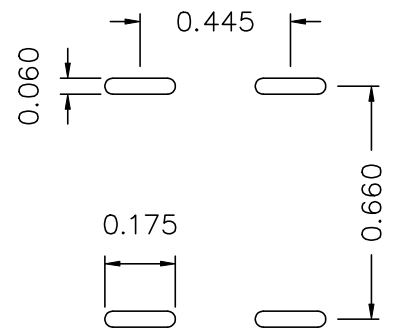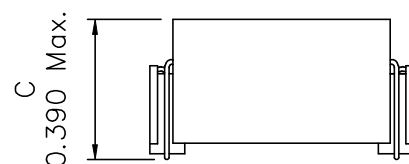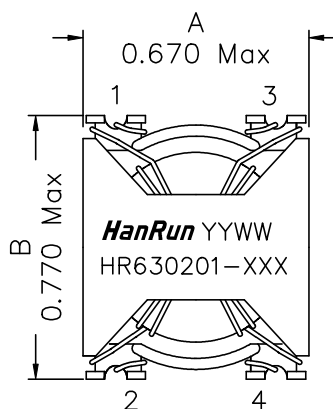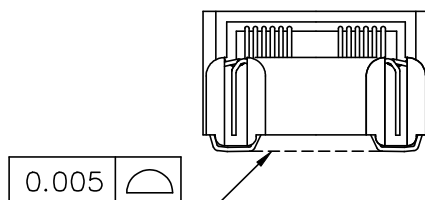

(SUGGESTED MOUNTING PAD)

Unless otherwise specified,
Tol.: .xxx ± 0.010 (inch)