

H00715006


Electrical Specification @25°C

Properties	Test condition	Value	Unit	Tol.
Isolation	P1,4 to P8,9,12,15 2mA 3sec	3000	Vrms	Min.
Isolation	P8 to P9,12,15; P9 to P12 to P15 1mA 60sec	1800	Vrms	Min.
Isolation	P1 to P4 1mA 60sec	500	Vrms	Min.
Isolation	Windings to Core 1mA 60sec	1000	Vrms	Min.
Inductance	P1-2 @100KHz 0.1Vrms	34.0	uH	±15%
Lk Inductance	P1-2 @100KHz 0.1Vrms, short other windings	0.9	uH	Max.
DC Resistance	P1-2	145.0	mohms	Max.
DC Resistance	P4-3	1.00	ohms	Max.
DC Resistance	P8-7	1.15	ohms	Max.
DC Resistance	P9-10	1.20	ohms	Max.
DC Resistance	P12-13	1.25	ohms	Max.
DC Resistance	P15-16	1.30	ohms	Max.
Insulation Resistance	Pri. to Sec.; Windings to Core 500.0 VDC	100.0	Mohms	Min.
Turns Ratio	P1-2:P8-7:P9-10:P12-13:P15-16:P4-3 @100KHz 0.1Vrms	18: 35: 35: 35: 35: 21		


General Information

RoHS	Compliant
Operation Temperature	-40°C ~ +85°C

Schematic



Mechanical Dimensions

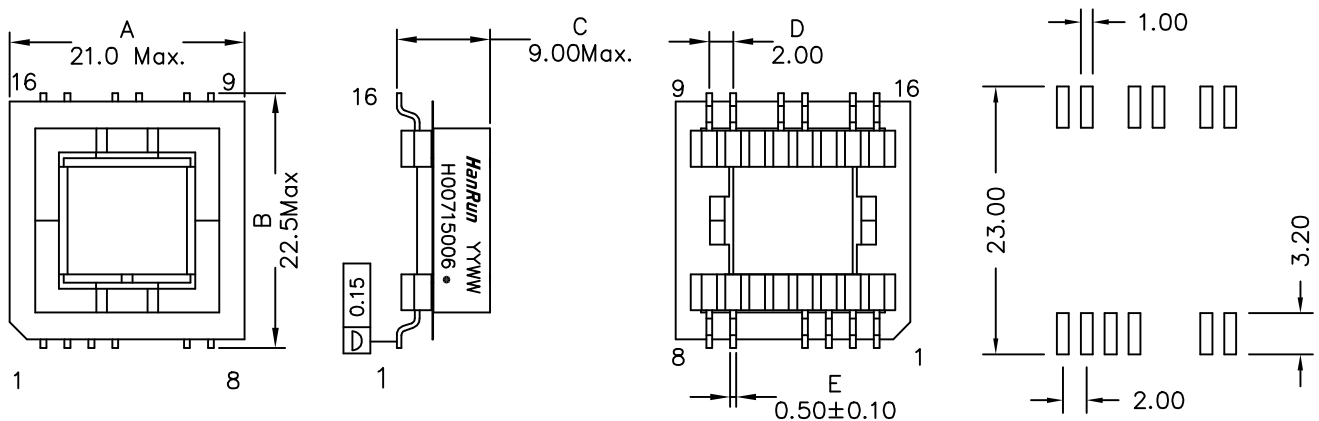

Remark: Removed P5#,6#,11#,14#

REV.: A1

Unless otherwise specified, Tol.: .xx ± 0.25(mm)

1 of 1

DRAWN: yuanwangsheng 2025-07-28 CHECKED:

APPROVED: David

2025-07-28

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com