

HR611206

Electrical Specification @25°C

Isolation: 1500Vrms (Primary to Secondary)

PRI OCL: 200uH Typical @100KHz 50mV


Turns Ratio: 1CT:1CT $\pm 5\%$

PRI DC Resistance: 0.35 ohms Maximum


PRI/SEC Cw/w: 15pF Maximum @100KHz 50mV

PRI Leakage Inductance: 0.4uH Maximum @100KHz 50mV SEC Shorted

Schematics

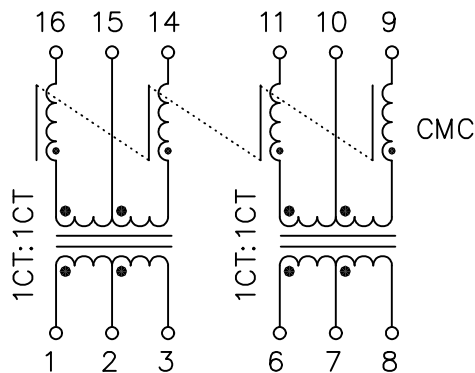

Mechanical Dimensions

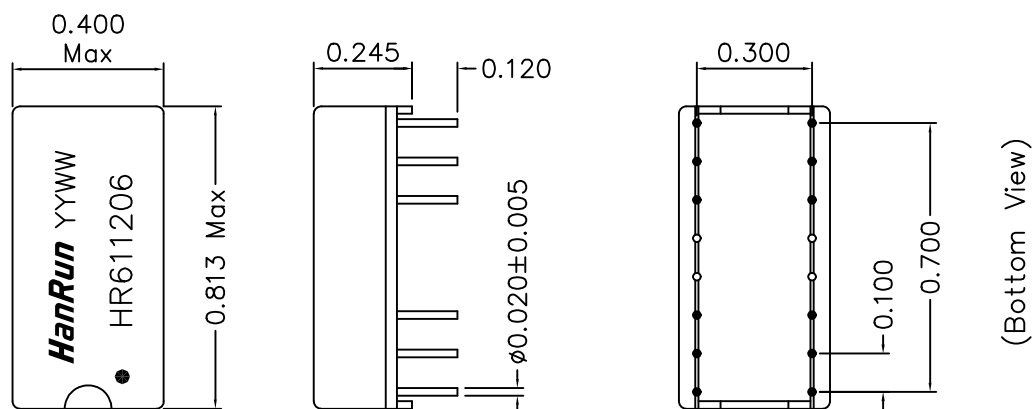

Dimensions in inches

Unless otherwise specified, Tol.: .xxx ± 0.010

REV.: A2

1 of 1