

HR102590

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 1500Vrms 1mA 3S (Pri.&Aux. to Sec.) ; 1000Vrms 1mA 3S (Pri. to Aux.)

Isolation: 1000Vrms 1mA 3S (Windings to Core)

Pin1,2-3,4 Inductance: 30.0 uH $\pm$ 10% @100KHz 0.1Vrms (Tie P1+2, P3+4)

Pin1,2-3,4 Leakage Inductance: 1.0 uH Max. @100KHz 0.1Vrms

(Tie P1+2, P3+4, Shorted other Windings)

Pin1,2-3,4 DC Resistance: 55.0 mohms Maximum (Tie P1+2, P3+4)

Pin5-6 DC Resistance: 220.0 mohms Maximum

Pin8-7 DC Resistance: 90.0 mohms Maximum


Pin11,12-9,10 DC Resistance: 120.0 mohms Maximum (Tie P9+10, P11+12)

Turns Ratio: (Tie P1+2, 3+4, 9+10, 11+12) @100kHz 0.1Vrms


P1,2-3,4 : P5-6 : P8-7 : P11,12-9,10 = 15 : 6 : 6 : 23

Input: 36~72V Output: 48V/1.25A

Schematics

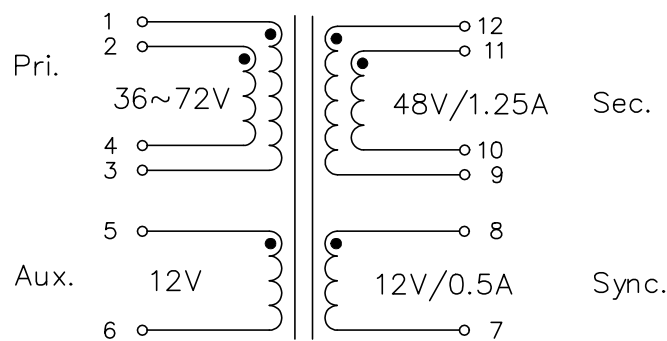

Mechanical Dimensions

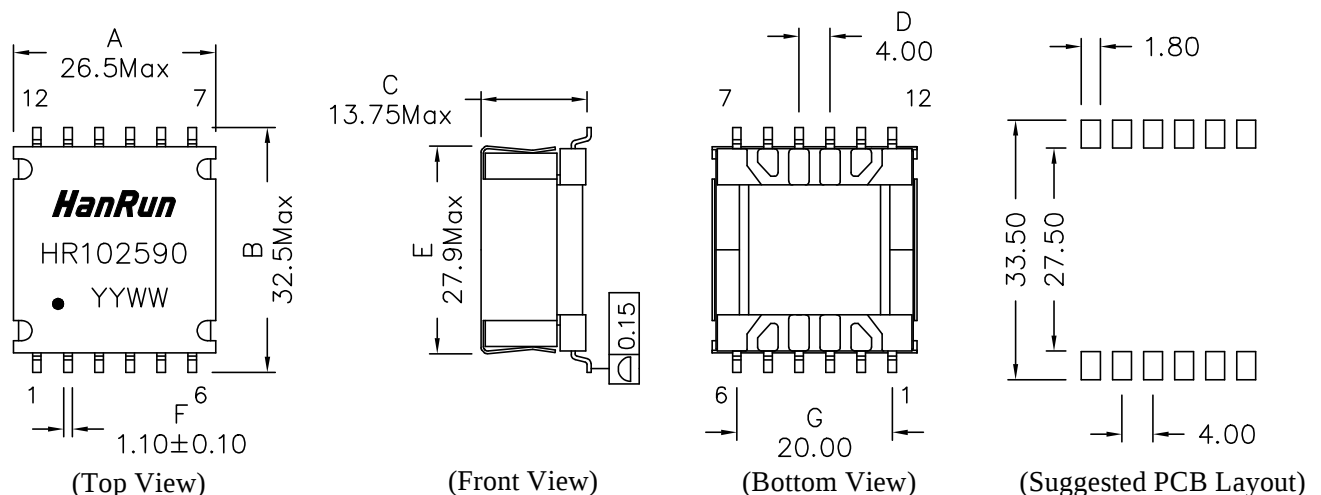

Unless otherwise specified,
Tol.: .xx $\pm$ 0.25 (mm)