

H23020101


Electrical Specification @25°C

Properties	Test condition	Value	Unit	Tol.
Isolation	Pri. to Sec. 1mA 1S	1250	Vrms	Min.
Isolation	Windings to Core 1mA 1S	1000	Vrms	Min.
Inductance	P1,2,3-4,5,6 @10KHz 0.1Vrms Ls	12.0	uH	±10%
Inductance	P1,2,3-4,5,6 rolloff from initial @10KHz 0.1Vrms Ls +17.5A	20%	uH	Typ
Lk Inductance	P1,2,3-4,5,6 @100KHz 0.01Vrms, short other windings	0.3	uH	Max.
DC Resistance	P1,2,3-4,5,6	16.0	mohms	Max.
DC Resistance	P10,11,12-7,8,9	15.0	mohms	Max.
Turns Ratio	P1,2,3-4,5,6: 10,11,12-7,8,9 @10KHz 0.1Vrms	1:1		
Application of the transformer allows for the leadwires between terminals 1&2&3, 4&5&6, 7&8&9, and 10&11&12 to solder bridge				

General Information

RoHS	Compliant
Operation Temperature	-40°C ~ +125°C

Schematic

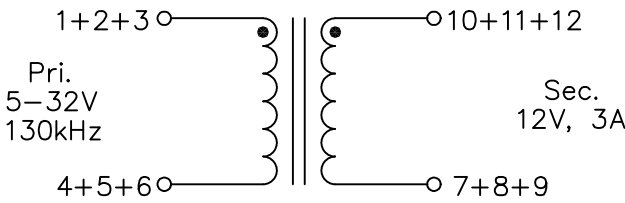

Mechanical Dimensions

