

HR835076

Features :


- ◆ Continuous short-circuit protection
- ◆ No-load input current as low as 8mA
- ◆ Operating ambient temperature range: -40°C to +105°C
- ◆ High efficiency
- ◆ High power density
- ◆ I/O isolation test voltage 3kVDC
- ◆ Industry standard pin-out
- ◆ RoHS Compliant (Pb Free)

Description :

The module is low cost 2W DC/DC converters in a standard SIP7 footprint. This makes it suitable for price sensitive industrial, test and measurement and high volume applications. The converter is pin-compatible with Industry standard, offering a simple way to upgrade a 1W high isolation supply to 2W.

It is designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits, where:

- ◆ The voltage of the input power supply is relatively stable with a variation of $\pm 10\%$ vin or less;
- ◆ A high input to output isolation voltage of ≤ 3000 VDC is necessary;
- ◆ The requirement for a tight output regulation and low ripple & noise is not as strict.

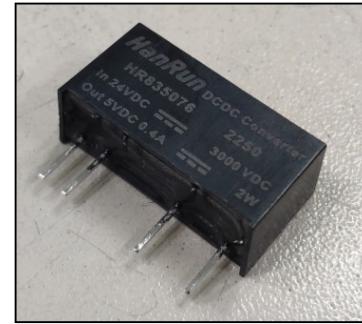

Electrical Specification

Input Specifications					
Item	Opeaeture Conditions	Min.	Typ.	Max.	Unit
Input Voltage	DC Input	21.6	24	26.4	VDC
Input Current (full load / no-load)	Nominal input voltage	—	104/8	—	mA
Reflected Ripple Current		—	15	—	mA
Surge Voltage (1sec. max.)	Input voltage 24VDC	-0.7	—	30	VDC
Input Filter		Capcitance filter			
Hot Plug		Unavailable			
Output Specifications					
Item	Opeaeture Conditions	Min.	Typ.	Max.	Unit
Output Current	Nominal input voltage	0.04	—	0.4	ADC
Output Voltage	Nominal input voltage	—	5	—	VDC
Output Voltage Accuracy	Nominal input voltage	See output regulation curve			
Line Regulation	Input voltage change : $\pm 1\%$	—	—	± 1.2	
Load Regulation	10%–100% load	—	7	—	%
Ripple & Noise	20MHz bandwidth	—	75	180	mVp-p
Temperature Coefficient	Full load	—	± 0.02	—	%/C
Short circuit Protection		Continuous, self-recovery			
Capacitive Load	At nominal input and resistive load	—	—	2400	μF

HR835076



General Specifications									
Item	Operaeture Conditions	Min.	Typ.	Max.	Unit				
Isolation Voltage (Input to output)	1mA Max and 1 minute	3000	—	—	VDC				
Insulation Resistance	Input to output, At 500VDC	1000	—	—	Mohm				
Operating Temperature	Refer to "Derating Graph"	—40		+105	°C				
Storage Temperature	Only for power module	—55	—	+125	°C				
Storage Humidity	Non-condensing	—	—	95%	%RH				
Switching Frequency	Full load, nominal input voltage	—	250	—	KHz				
Efficiency	Full load, nominal input voltage	74	80	—	%				
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	—	20	—	pF				
Welding Temperature	Wave-soldering	260 ± 5°C; time: 5 –10s							
Case Temperature Rise	Ta=25C°	—	25	—	°C				
Vibration	MIL-HDBK-217F @ 25°C	10–150Hz, 5G, 0.75mm. along X, Y and Z							
MTBF		3500	—	—	Khours				
Isolation Grade		Functional							
Physical Specifications									
Casing Material	Black flame-retardant and heat-resistant plastic (UL94V-0)								
Dimension	19.65*7.05*10.1mm, Horizontal package								
Weight	2.4g typ.								
Colling Method	Free air convection								
Electromagnetic Compatibility (EMC)									
Emission	CE	CISPR32/EN55032 CLASS B							
	RE	CISPR32/EN55032 CLASS B							
Immunity	ESD	IEC/EN61000-4-2 Air ±8kV, Contact ±6kV perf. Criteria B							
Note: Refer to the figure for recommended circuit test									

Note :

- ◆ All parameters are specified at normal input, rated load, 25°C ambient.
- ◆ Ripple & noise are measured by using a probe terminated with a 0.1uf & 47uf capacitor
- ◆ Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds as possible.
- ◆ This part is not designed for parallel operation.
- ◆ For repeat Hi-Pot testing, reduce the time and/or the test voltage.
- ◆ Specifications may not be met if operation below 10% load.

HR835076

Typical Performance Curves:

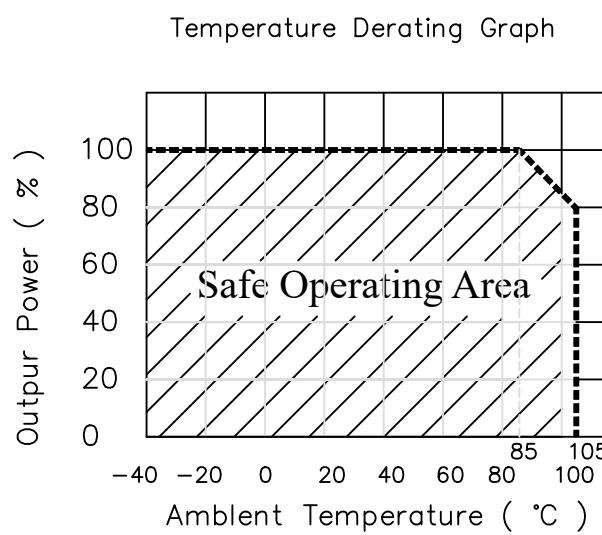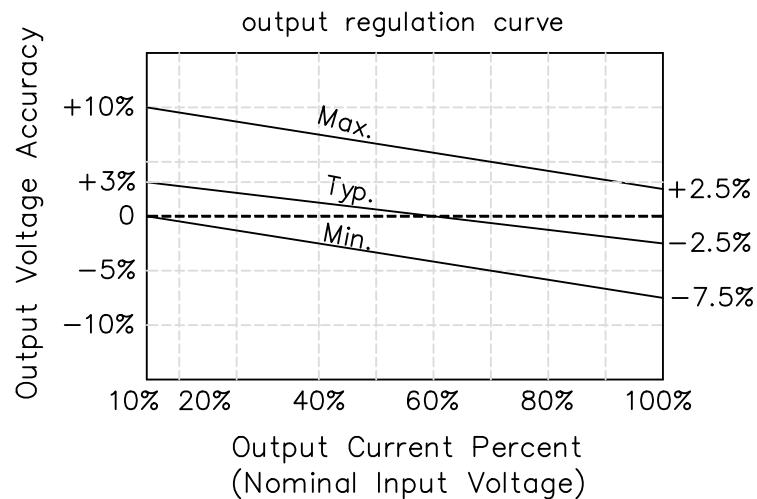


HR835076

Design Reference:


1.Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown .

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high.

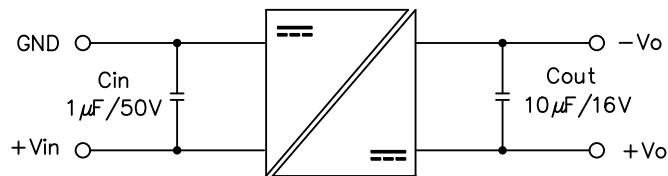

2.EMC compliance circuit

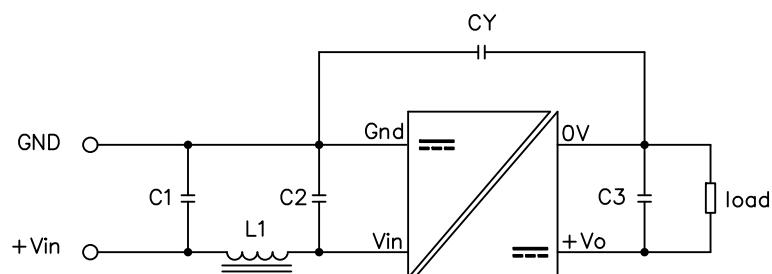

$C1/C2=4.7 \mu F/50V$; $C3=10 \mu F$; $Cy =270 \mu F/3KV$; $L1=6.8 \mu H$

2W isolated DC-DC converter
Fixed input voltage, unregulated single output




HR835076


Pin Assignment

Pin	1	2	3	4	5	6	7
Function	+Vin	GND	no pin	no pin	0V	no pin	+Vo

Recommended Test Circuit

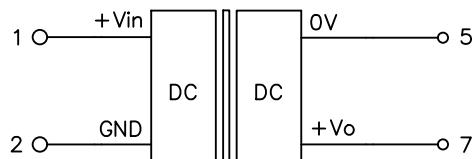

Mechanical Dimensions

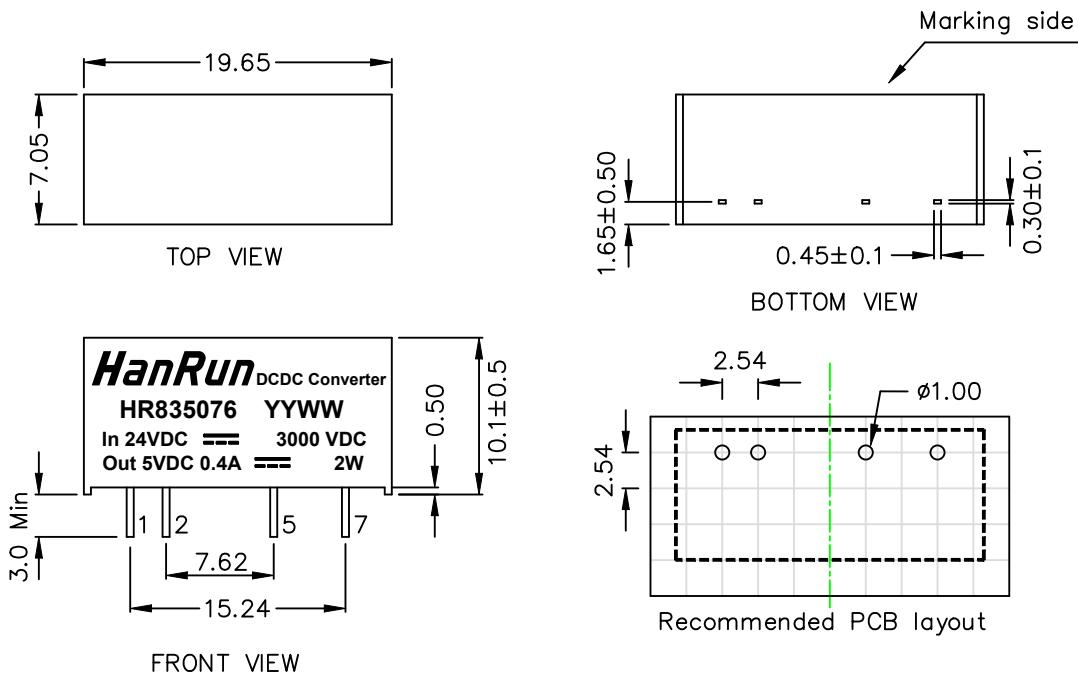

REV.: 00

Unless otherwise specified, Unit in mm
Tol.: .x ± 0.5 (mm), .xx ± 0.25 (mm)

5 of 6

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China
Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com

HR835076 packing specifications

