


HR320201-XXX

Electrical Specification @25°


Part Number	Inductance (uH ±20%)	DC Current (Amps Max)	DCR (ohms ±20%)	Test Frequency
HR320201-3R3	3.3	2.50	0.020	1KHz
HR320201-4R7	4.7	2.00	0.030	1KHz
HR320201-6R8	6.8	1.70	0.039	1KHz
HR320201-100	10	1.30	0.036	1KHz
HR320201-150	15	1.10	0.052	1KHz
HR320201-220	22	0.90	0.061	1KHz
HR320201-330	33	0.82	0.096	1KHz
HR320201-470	47	0.75	0.125	1KHz
HR320201-680	68	0.60	0.175	1KHz
HR320201-101	100	0.50	0.250	1KHz
HR320201-151	150	0.40	0.340	1KHz
HR320201-221	220	0.33	0.520	1KHz
HR320201-331	330	0.25	0.740	1KHz
HR320201-471	470	0.22	1.050	1KHz
HR320201-681	680	0.20	1.480	1KHz
HR320201-102	1000	0.14	2.280	1KHz

HR320201-XXX

Schematics




Mechanical Dimensions

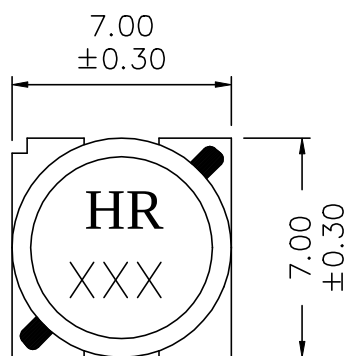


(TOP VIEW)



(SIDE VIEW)

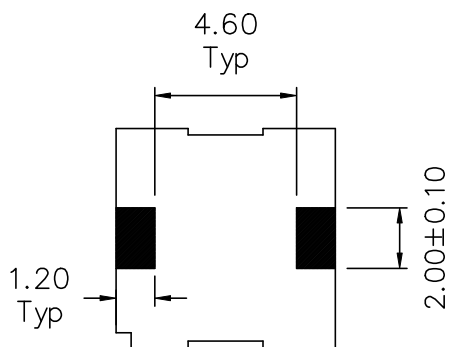

(BOTTOM VIEW)



(SUGGESTED MOUNTING PAD)

Unless otherwise specified,
Tol.: .xx ±0.25 (mm)