

HY600655

Electrical Specification @25°C

PRIMARY PINS: PIN1-3

Isolation Voltage: 1500Vrms 0.5mA 60sec (Pri. to Sec.)

Turns Ratio: (1-2-3):(6-5-4)=1CT:2CT $\pm 2\%$

PRI OCL: 1.2mH Minimum @100KHz 50mV


Leakage Inductance: 0.50uH Maximum @100KHz 50mV

Cw/w: 40pF Maximum @100KHz 50mV


PRI DCR: 0.70 ohms Maximum (PIN1-3)

SEC DCR: 1.40 Ohms Maximum (PIN6-4)

Schematics

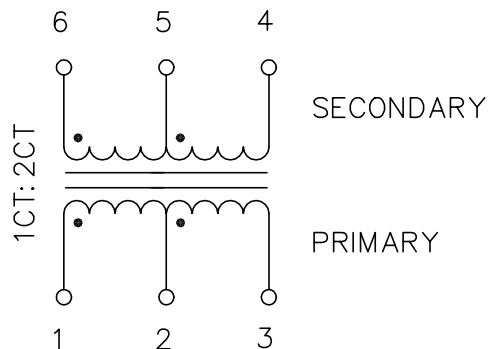

Mechanical Dimensions

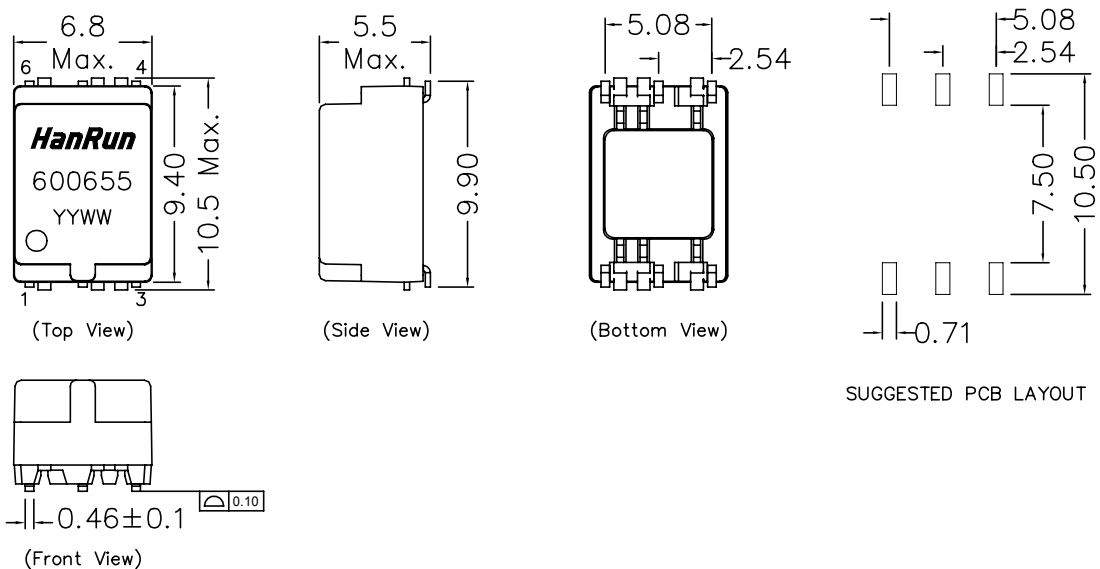

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ± 0.25

REV.: 02

1 of 1

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
Zhongshan City, Guangdong Province, China

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com <http://www.hanrun.com>