

HR619602

Electrical Specification @25°C

RoHS Compliant (PB Free)

Operating Temperature Range: 0°C ~ +70°C

Isolation: 1500Vrms 0.5mA 60sec (Primary to Secondary)

OCL: 350uH Minimum @100KHz 100mV with 8mADC


Insertion Loss: -1.0dB Maximum @1MHz ~ 100MHz

Return Loss: -18dB Minimum @1MHz ~ 30MHz / -13.5dB Minimum @30MHz ~ 60MHz
-12dB Minimum @60MHz ~ 80MHz / -10dB Minimum @80MHz ~ 100MHz

Common Mode Rejection: -30dB Minimum @1MHz ~ 100MHz


Crosstalk: -30dB Minimum @1MHz ~ 60MHz / -26dB Minimum @60MHz ~ 100MHz

Schematics

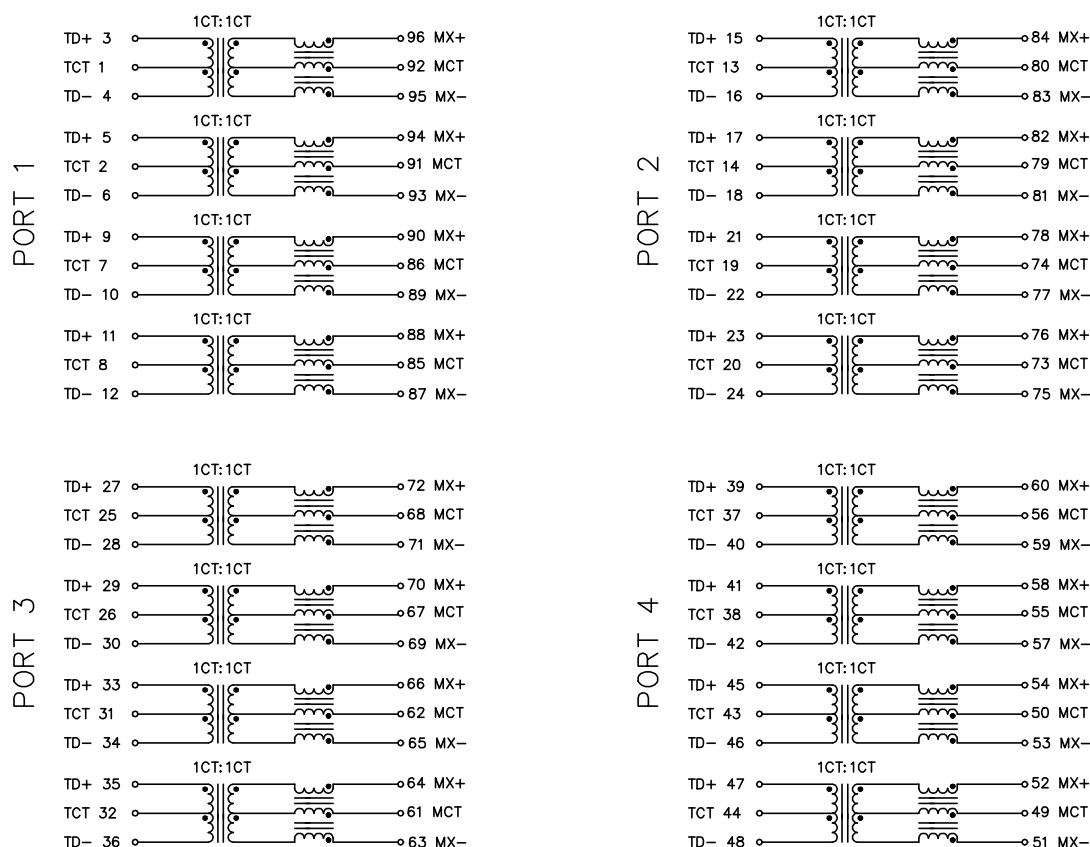


HR619602


Mechanical Dimensions

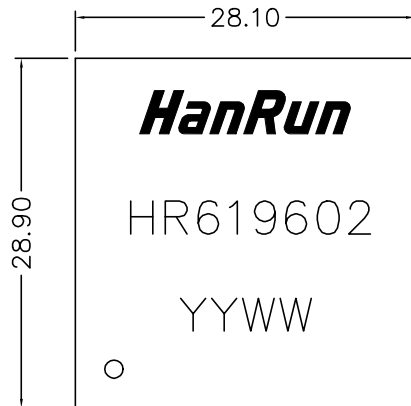


Top View

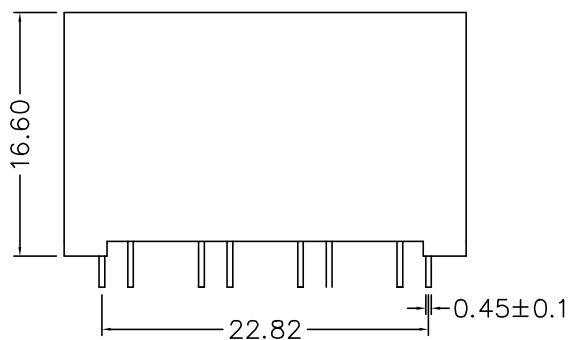

Front View

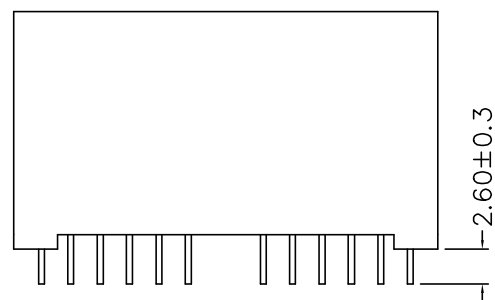

Side View

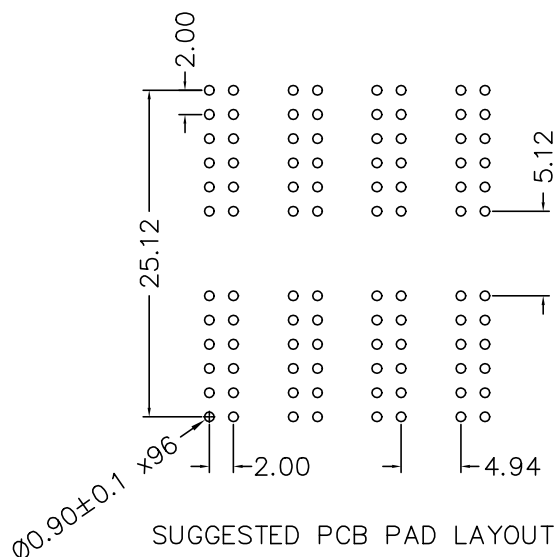

PORT1	PORT2	PORT3	PORT4
91 ○ Q85	79 ○ Q73	67 ○ Q61	55 ○ Q49
92 ○ Q86	80 ○ Q74	68 ○ Q62	56 ○ Q50
93 ○ Q87	81 ○ Q75	69 ○ Q63	57 ○ Q51
94 ○ Q88	82 ○ Q76	70 ○ Q64	58 ○ Q52
95 ○ Q89	83 ○ Q77	71 ○ Q65	59 ○ Q53
96 ○ Q90	84 ○ Q78	72 ○ Q66	60 ○ Q54
6 ○ Q12	18 ○ Q24	30 ○ Q36	42 ○ Q48
5 ○ Q11	17 ○ Q23	29 ○ Q35	41 ○ Q47
4 ○ Q10	16 ○ Q22	28 ○ Q34	40 ○ Q46
3 ○ Q9	15 ○ Q21	27 ○ Q33	39 ○ Q45
2 ○ Q8	14 ○ Q20	26 ○ Q32	38 ○ Q44
1 ○ Q7	13 ○ Q19	25 ○ Q31	37 ○ Q43

Pin Assignments

Dimensions in mm

Unless otherwise specified, Tol.: .xx ±0.25

REV.: 01

2 of 2