

HR611657

Electrical Specification @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: (16-15-14):(1-2-3)=1CT:1CT $\pm 3\%$

Turns Ratio: (12-11-9):(6-7-8)=2CT:1CT $\pm 3\%$

PIN1-3 OCL: 1.2mH Minimum @100KHz 50mV

PIN6-8 OCL: 1.2mH Minimum @100KHz 50mV

PIN1-3 Leakage Inductance: 0.60uH Maximum @100KHz 50mV

PIN6-8 Leakage Inductance: 0.60uH Maximum @100KHz 50mV

PIN1-16 Cw/w: 35pF Maximum @100KHz 50mV


PIN9-8 Cw/w: 35pF Maximum @100KHz 50mV

PRI DCR: 0.70 ohms Maximum


PIN12-9 DCR: 1.20 Ohms Maximum

PIN16-14 DCR: 0.70 Ohms Maximum

Schematics

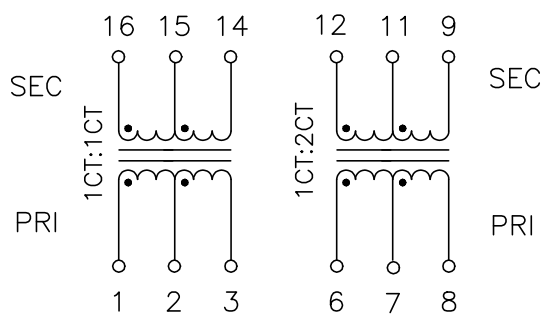

Mechanical Dimensions

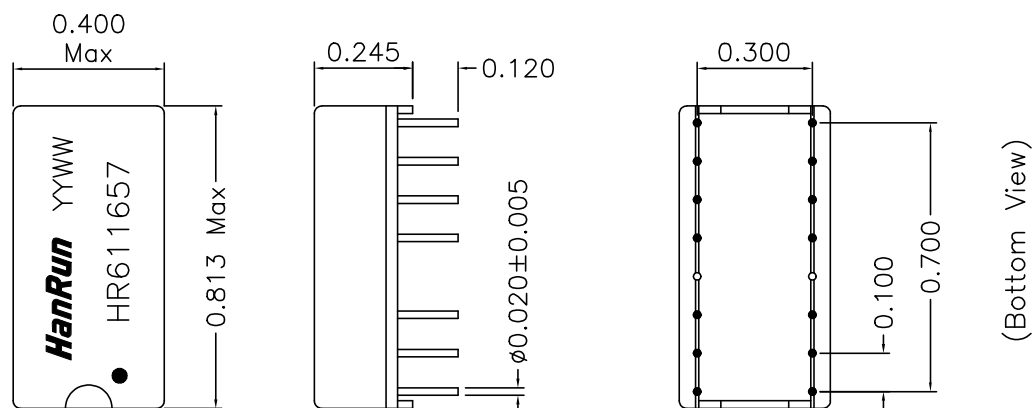

Dimensions in inches

Unless otherwise specified, Tol.: .xxx ± 0.010

REV.: A1

1 of 1