

HR081362

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 1500Vrms 1mA 60S (Pri. & Aux. to Sec.)

Isolation: 500Vrms 1mA 60S (Windings to Windings; Windings to Core)

Pin1-3 Inductance: 21.0 uH $\pm 10\%$ @200KHz 0.1Vrms

Pin1-3 Inductance: 30% Max. rolloff from initial @200KHz 0.1Vrms +6.2A

Pin1-3 Leakage Inductance: 0.16 uH Max. @200KHz 0.1Vrms (Shorted other windings)

Pin1-3 DC Resistance: 31.0 mohms Max.

Pin4-5 DC Resistance: 80.0 mohms Max.

Pin9-6 DC Resistance: 17.0 mohms Max.

Pin10-7 DC Resistance: 17.0 mohms Max.


Turns Ratio: @100kHz 0.1Vrms

P1-3 : P4-5 : P9-6 : P10-7 = 1 : 0.333 : 0.333 : 0.750


Input: 9-57V, Output: 5.0V, 2.2A*2 @200KHz

Operation Temperature: -40°C ~ +125°C Storage Temperature: -40°C ~ +85°C

Schematics

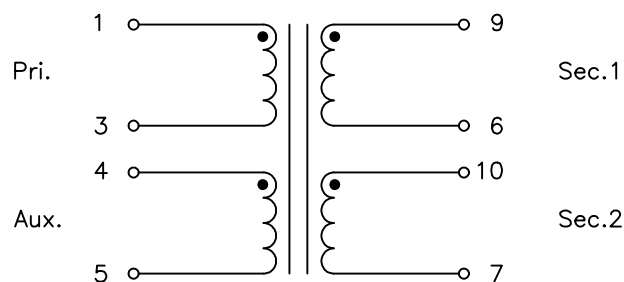

Mechanical Dimensions

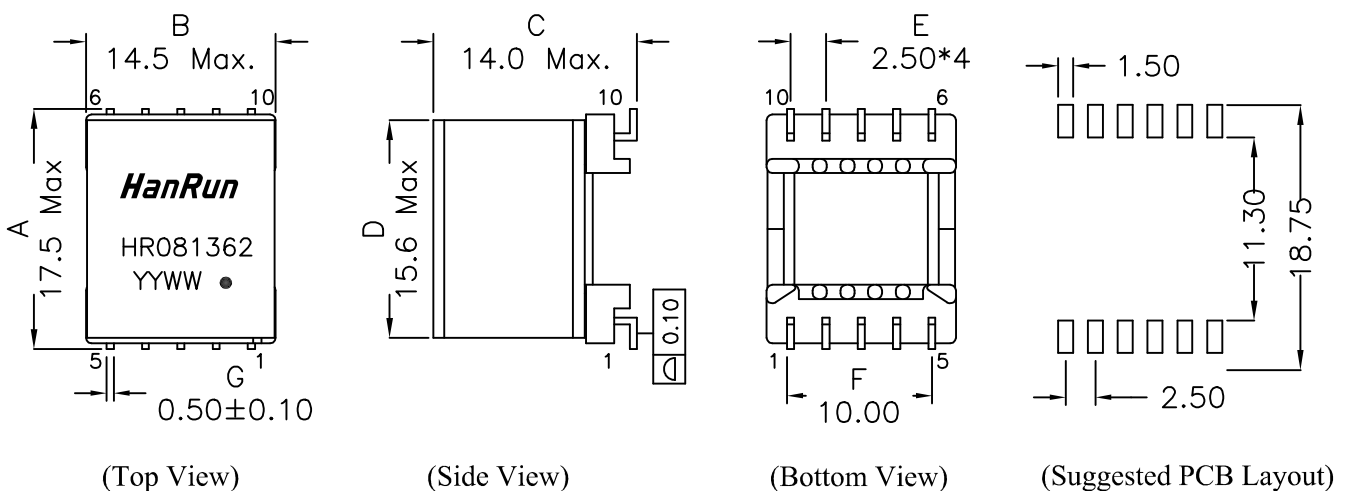

Unless otherwise specified, Tol.:

.xx $\pm$ 0.25 (mm)

REV.: 00

1 of 1

Address: No.16, Industrial Road Central, Industrial Zone, Xiaolan Town,
 Zhongshan City, Guangdong Province, China

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com