

HR110402

Electrical Specification @25°C

RoHS Compliant (Pb Free)

TURN RATIO: (PIN1-2) : (PIN4-3) = 1 : 1 @100KHz 1.0Vrms


INDUCTANCE: 33mH Minimum @100KHz 1.0Vrms

DC Resistance: 1.6 ohms maximum




Rated Current: 0.50Aac/Line

HI-POT: 2000Vrms 1mA 3S (PIN1-2 TO PIN3-4)

Schematics

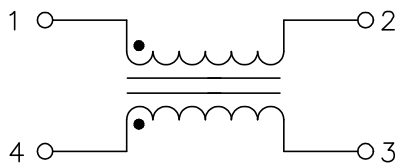

Mechanical Dimensions

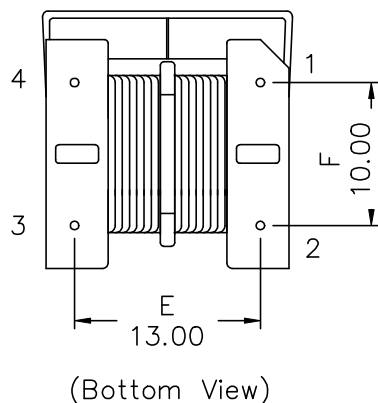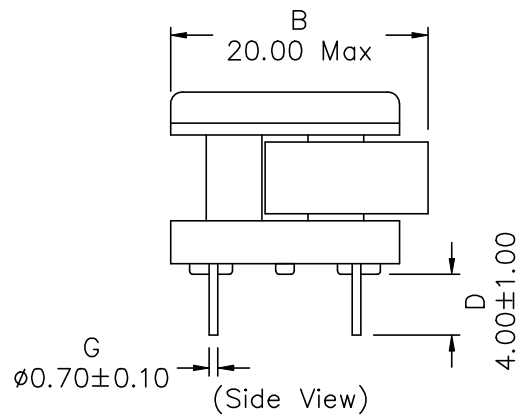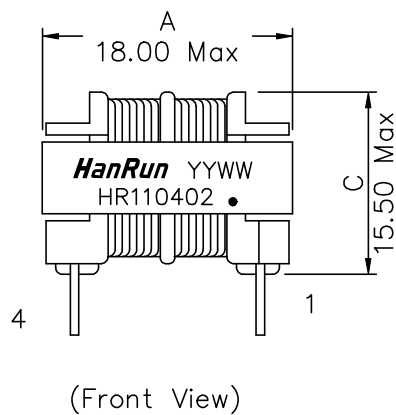

Unless otherwise specified,
Tol.: .xx ± 0.25 (mm)