

HR600914

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Operating Temperature Range: 0°C ~ +70°C

Isolation: 5000Vrms 1.0mA 60s (P3-4 to P5-8)

P5-8 Inductance: 200 uH Min. @100KHz 0.1V

P5-8 Leakage Inductance: 0.5 uH Max. @100KHz 0.1V (Shorted P3-4)


DCR: 0.15 ohms Max.

Insertion Loss: 1.0 dB Max. @500KHz ~ 20MHz


Turns Ratio: P5-8 : P3-4 = 1 : 1 ±2%

Surge Test: 6.0KV @1.2/50uS ±5Times

Schematics

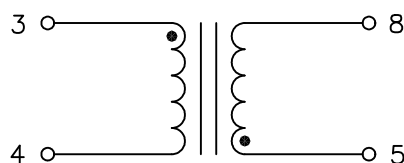

Mechanical Dimensions

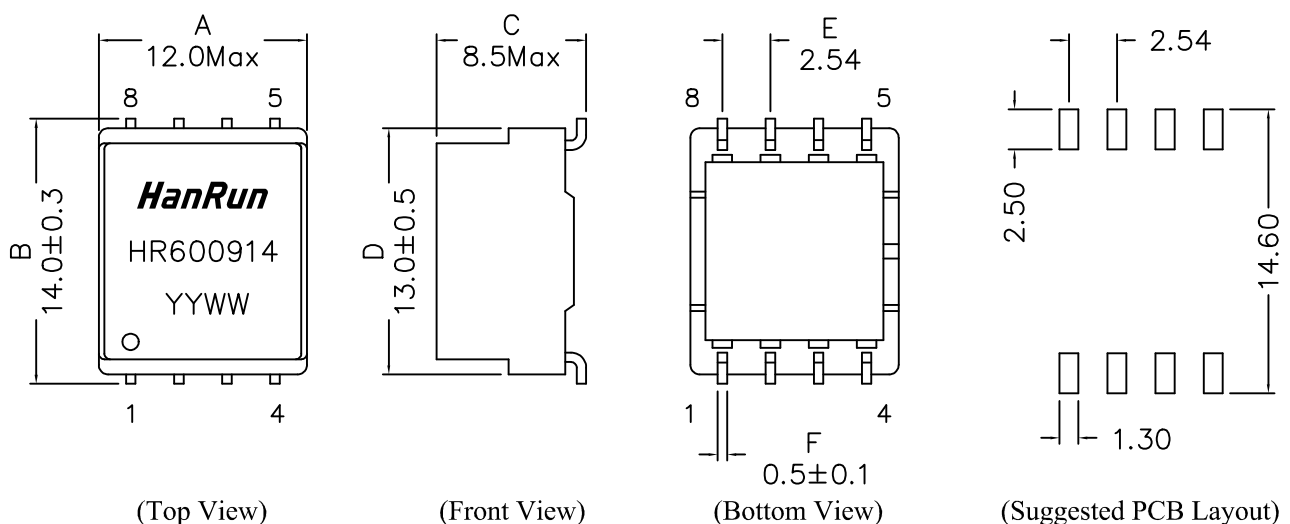

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: A0

1 of 1