

HR342260

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Isolation: 1500Vrms 1mA 60S (Winding to Winding)

Pin1-4=Pin2-3 Inductance: 50.0 mH $\pm 35\%$ @10KHz 0.1Vrms

Stray inductance: 0.5 mH Max. @10KHz 0.1Vrms

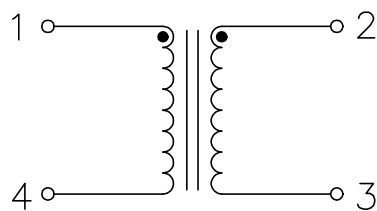
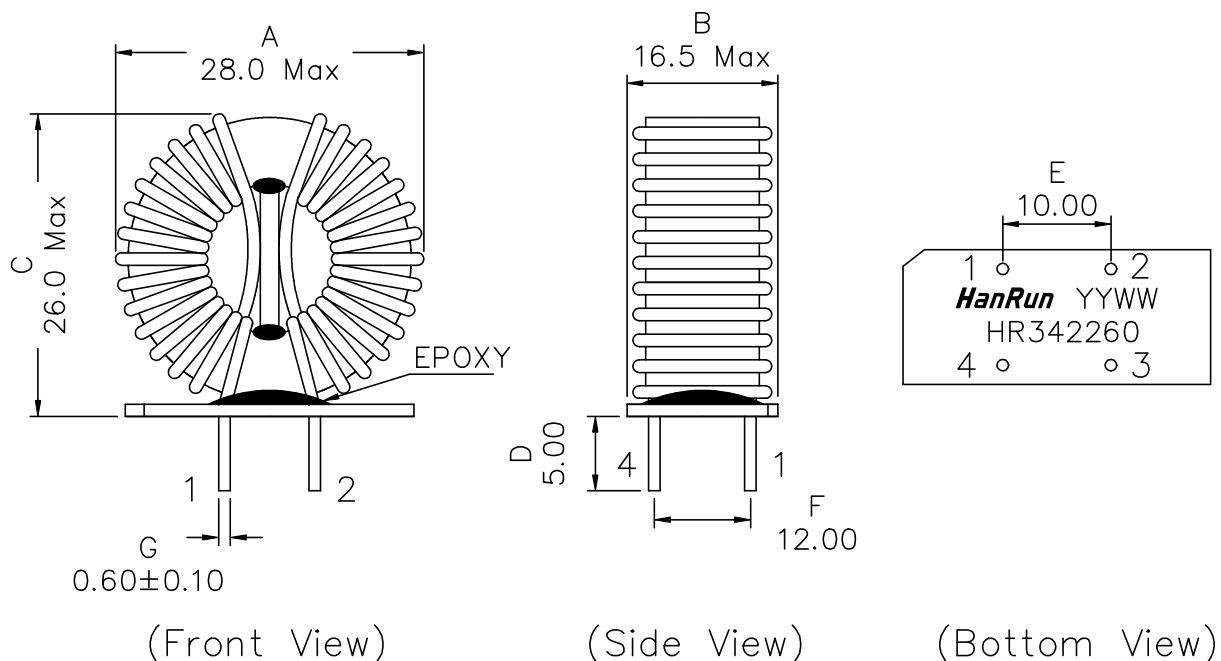
Pin1-4 DC Resistance: 100.0 mohms Max.

Pin2-3 DC Resistance: 100.0 mohms Max.

Turns Ratio: P1-4 : P2-3 = 1 : 1 @10KHz 0.1Vrms

Rated Current: 3.0 A

Storage Temp.: -20 to +60°C; Operating Temp.: -40 to +125°C

Schematics**Mechanical Dimensions**

Unless otherwise specified, Tolerance:
 .xx ± 0.50 mm Dimensions in mm

REV.00

1 of 1