

HR661202

Electrical Specification @25°C

RoHS Compliant (Pb Free)

Operating Temperature Range: 0°C ~ +70°C

Isolation: 3000Vrms 0.5mA 60sec (Primary to Secondary)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.1dB Maximum @300KHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 30MHz / -10dB Minimum @60MHz


-8dB Minimum @80MHz ~ 100MHz

Different to Common Mode Rejection: -35dB Minimum @30MHz ~ 50MHz


-30dB Minimum @100MHz

Crosstalk: -35dB Minimum @1MHz ~ 30MHz / -30dB Minimum @60MHz ~ 100MHz

Schematics

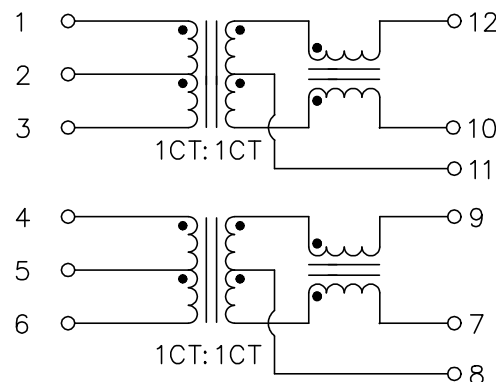

Mechanical Dimensions

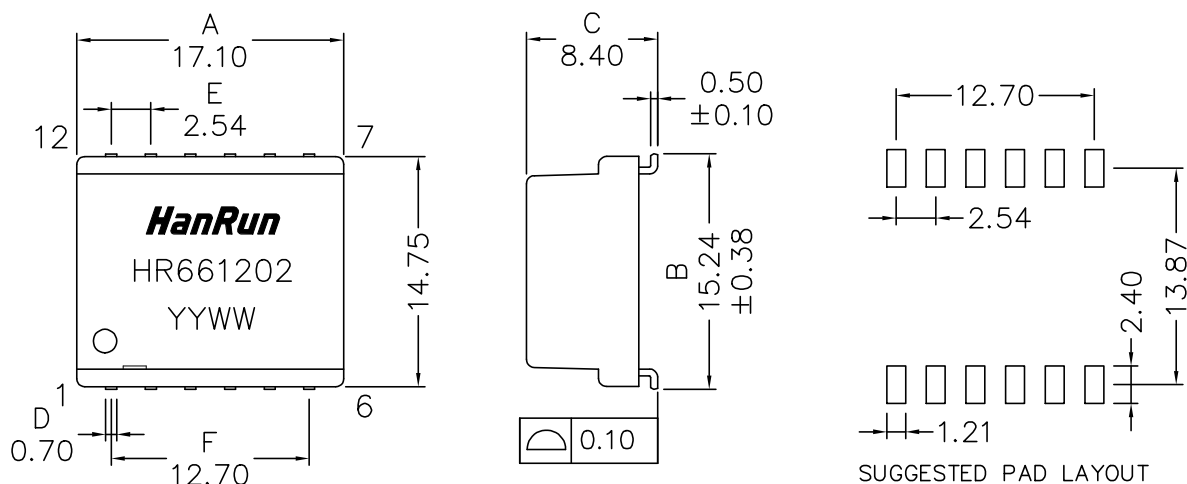

Dimensions in mm

Unless otherwise specified, Tol.: .xx ±0.25

REV.: 01

1 of 1