

HR682473E

Electrical Specification @25°C

RoHS Compliant (PB Free)

Storage Temperature Range: -40°C ~ +85°C

Isolation: 1500Vrms 0.5mA 60sec (Primary to Secondary)

OCL: 350uH Minimum @100KHz 100mV with 8mADC

Insertion Loss: -1.1dB Maximum @1MHz ~ 100MHz

Return Loss: -16dB Minimum @1MHz ~ 40MHz

-14dB Minimum @60MHz


-12dB Minimum @80MHz

-10dB Minimum @100MHz


Common Mode Rejection: -40dB Typical @1MHz ~ 100MHz

Crosstalk: -30dB Minimum @1MHz ~ 100MHz

Schematics

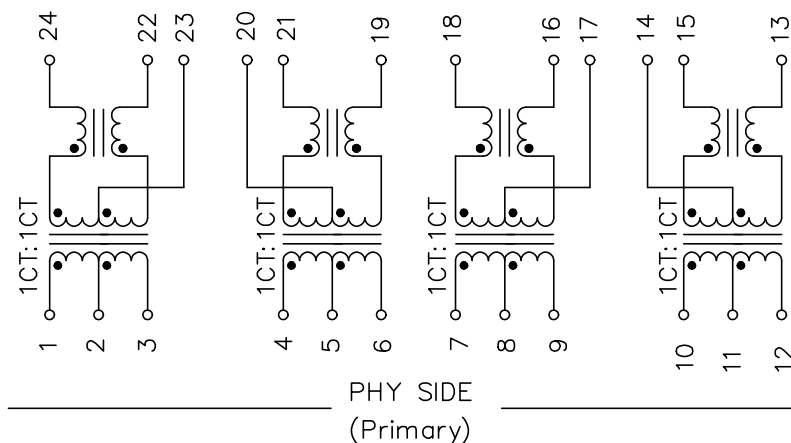

Mechanical Dimensions

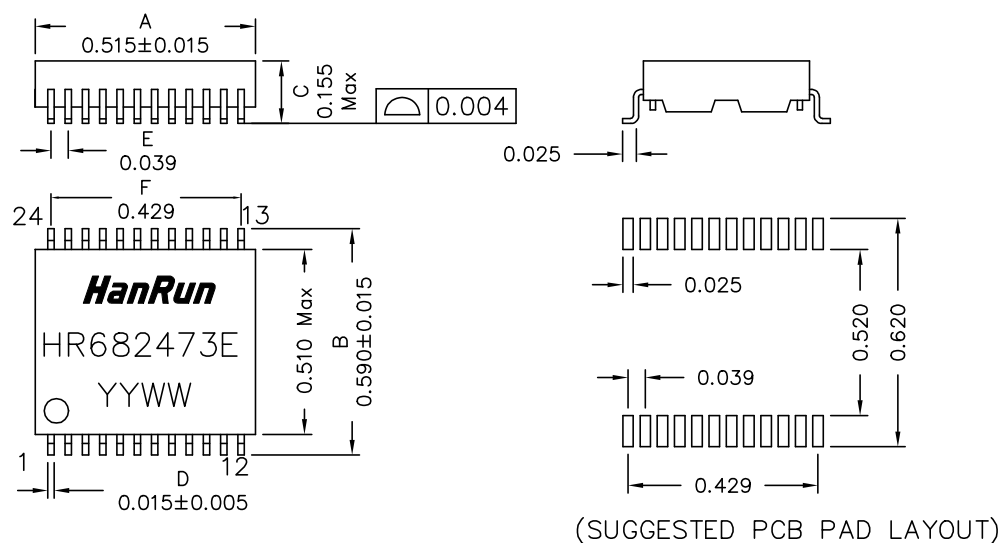

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV.: 01

1 of 1