


HR915410AE

Electrical Specification @25°C

Isolation:	2250VDC Min.	0.5mA 60sec UTP Side to Chip Side
OCL:	350uH Min.	@100KHz 100mV with 8mAADC
Insertion Loss:	-1.0dB Max.	@300KHz ~ 100MHz
Return Loss:	-20dB Min.	@1MHz ~ 10MHz
Return Loss:	-16dB Min.	@10MHz ~ 30MHz
Return Loss:	-12dB Min.	@30MHz ~ 60MHz
Return Loss:	-10dB Min.	@60MHz ~ 80MHz
Common Mode Rejection:	-30dB Min.	@1MHz ~ 50MHz
Common Mode Rejection:	-20dB Min.	@50MHz ~ 150MHz
Crosstalk:	-30dB Min.	@1MHz ~ 60MHz
Crosstalk:	-26dB Min.	@60MHz ~ 100MHz


Schematics

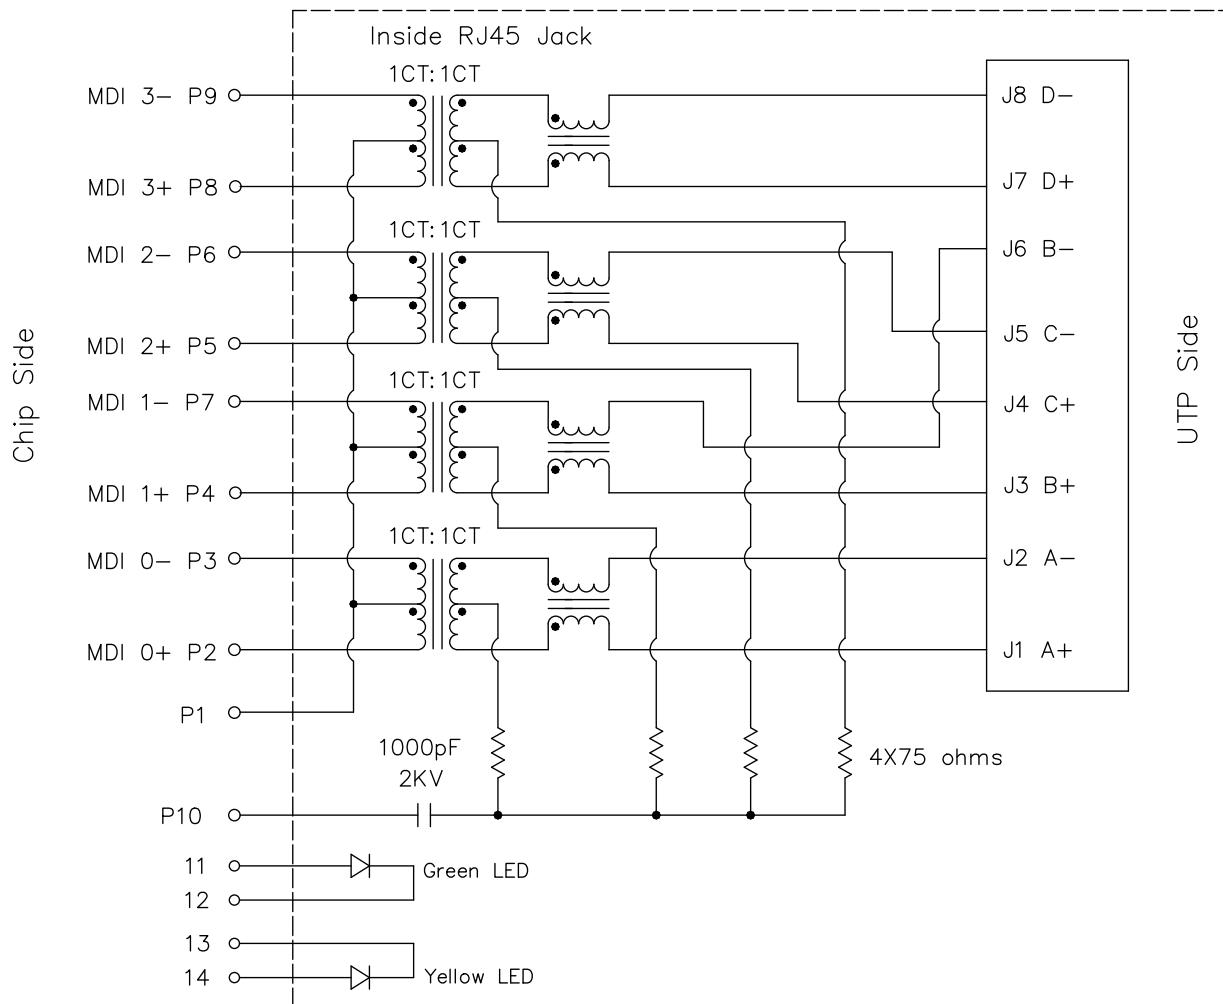


HR915410AE

- RoHS Compliant
- Meets or Exceeds IEEE802.3ab standards including 350uH Min OCL with 8mADC
- High performance for EMI suppression, Crosstalk, Return Loss and Consistent Electrical
- Minimum 2250VDC isolation per IEEE802.3 requirement
- Minimize PCB space and Simplify PCB Layout
- Less magnetic components to be placed on PCB, higher reliability and yields
- UL Recognized Component: File # E330599


Mechanical Dimensions

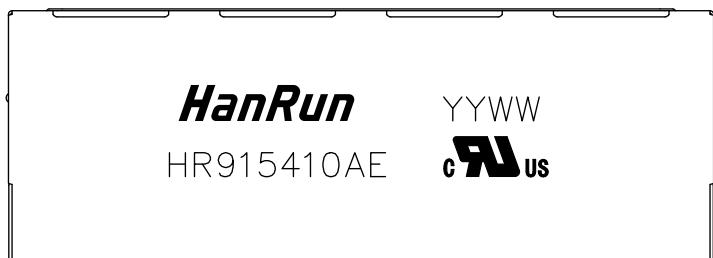



(Top View)

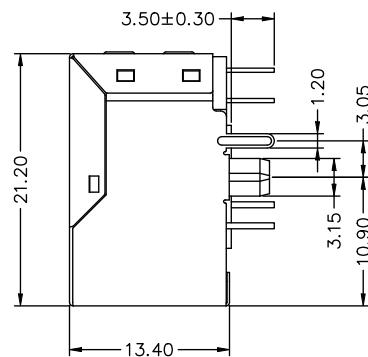

(Side View)

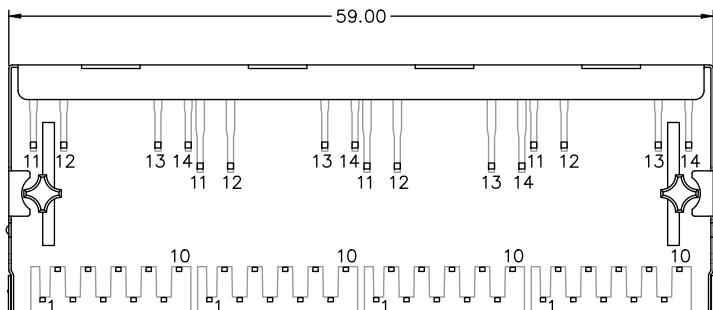

(Bottom View)

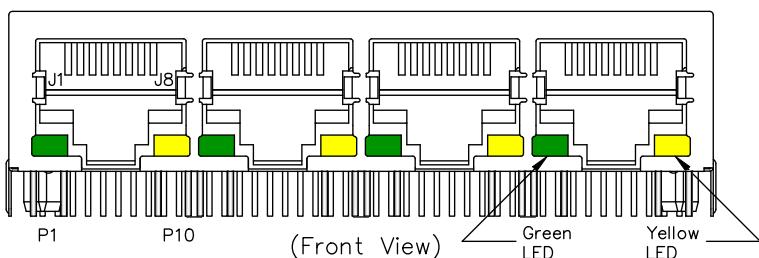

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8v/2.8v	20mA	squareness
Yellow	585nm	1.8v/2.8v	20mA	squareness

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ±0.25

REV.: A2

2 of 4

DRAWED:

CHECKED:


APPROVED:

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416

E-Mail: sales@hanrun.com http://www.hanrun.com

HR915410AE


PCB Layout

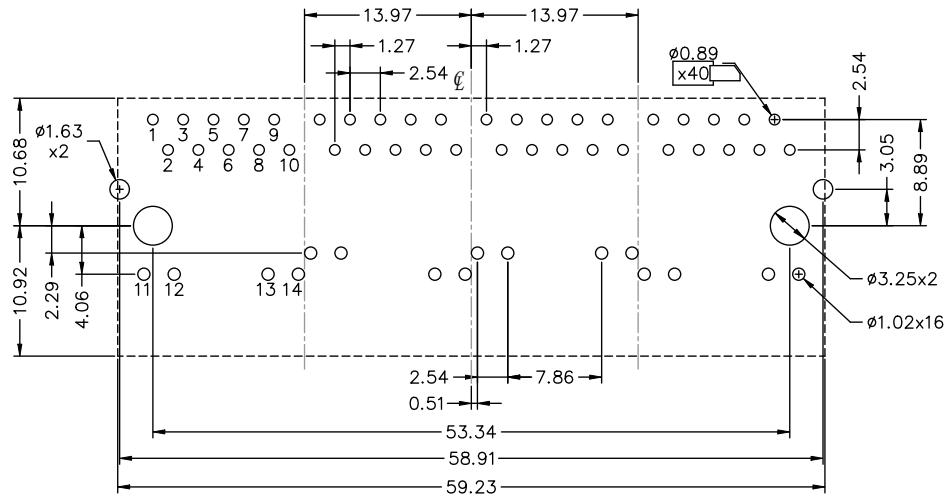

Recommended PCB layout (Component Side View)

All dimension tolerance are ± 0.08 unless otherwise specified

Suggested Panel Cutout

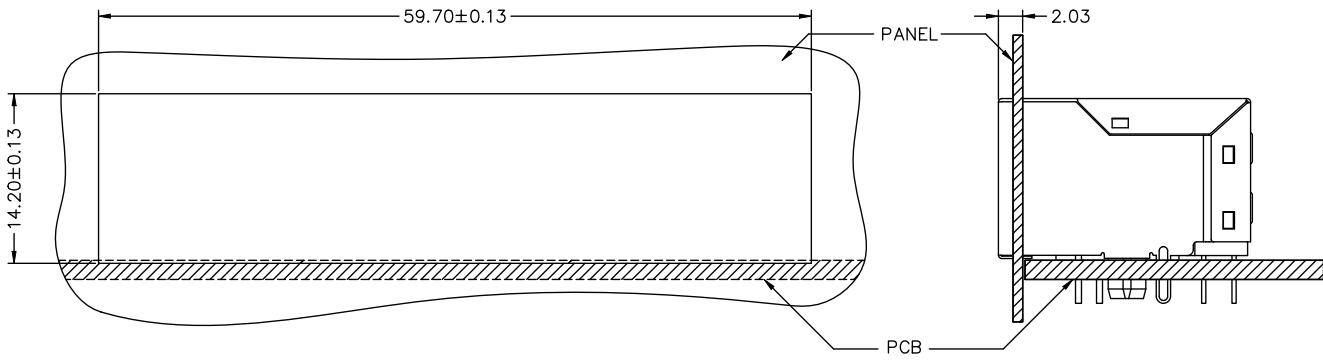

Dimensions in mm

Unless otherwise specified, Tolerance: .xx ± 0.25

REV.: A2

3 of 4

DRAWED:

CHECKED:

APPROVED:

Tel: (0760)86103511 86103508 Fax: (0760)86103686 Post code: 528416
E-Mail: sales@hanrun.com http://www.hanrun.com

HR915410AE

Material Specification

Housing: PA66 GF Black UL94V-0
Shield: 30u" Nickel over 0.20mm Thickness Brass
Insert: PA66 GF Black UL94V-0
 Phosphor Bronze 0.35mm Thickness
 Plating Area, 30u" gold over 50u" nickel
 Solder Area, 100u" tin over 50u" nickel

Mechanical Performance:

Mating force: 5 lbs Maximum
Unmating force: 5 lbs Maximum
Plug to Jack Retention force: 20 lbs Minimum
Operating life: 750 Cycles Minimum

Operating and Storage Temperature:

Operating Temperature Range: -40°C ~ +85°C
Storage Temperature Range: -40°C ~ +85°C