

HR641680

Electrical Specification @25°C

RoHS Compliant (PB Free)

Operating Temperature Range: -0°C ~ +70°C

Isolation: 1500Vrms 0.5mA 60sec (Primary to Secondary)

OCL: 350uH Minimum @100KHz 100mV with 8mA DC

Turns Ratio: 1 : 1 ±2% (Primary : Secondary)

Insertion Loss: -1.0dB Maximum @300KHz ~ 100MHz

Return Loss: -18dB Minimum @1MHz ~ 30MHz / -14dB Minimum @30MHz ~ 60MHz


-12dB Minimum @60MHz ~ 80MHz

-10dB Minimum @80MHz ~ 100MHz


CMR: -30dB Minimum @1MHz ~ 100MHz

Crosstalk: -30dB Minimum @1MHz ~ 100MHz

Schematics

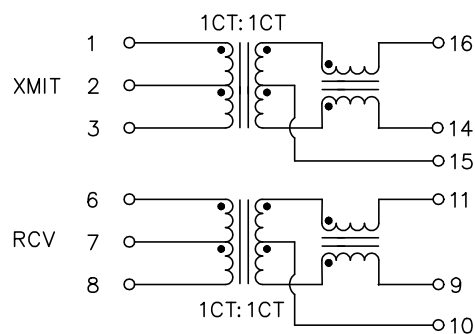

Mechanical Dimensions

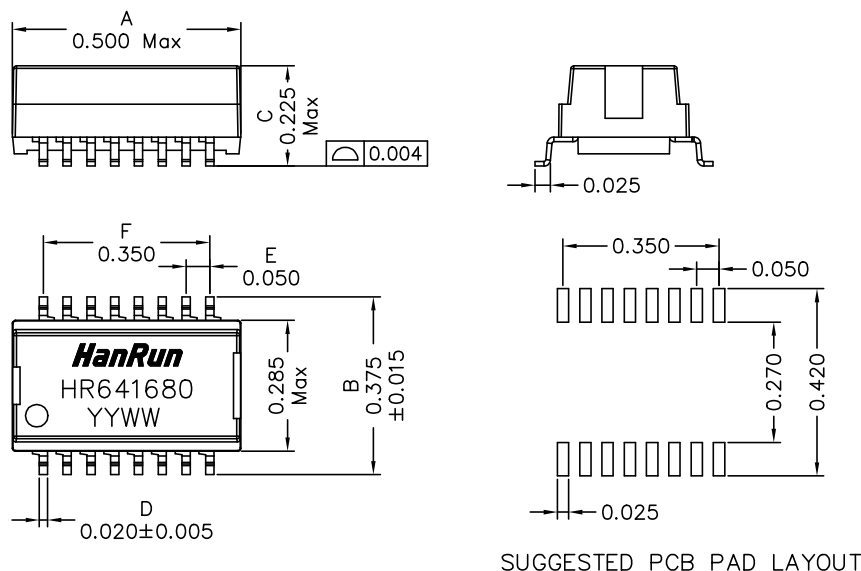

Dimensions in inches

Unless otherwise specified, Tolerance: .xxx ±0.010

REV.: 00

1 of 1